

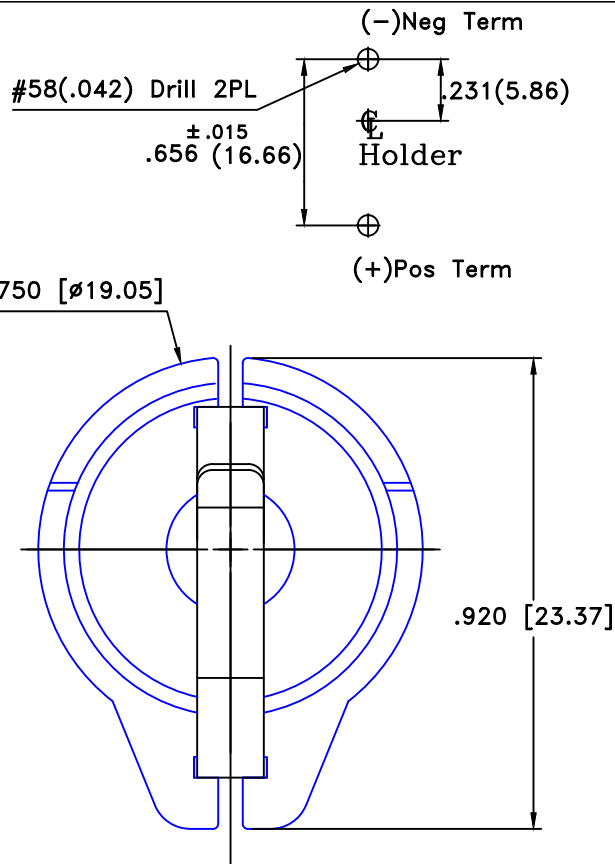


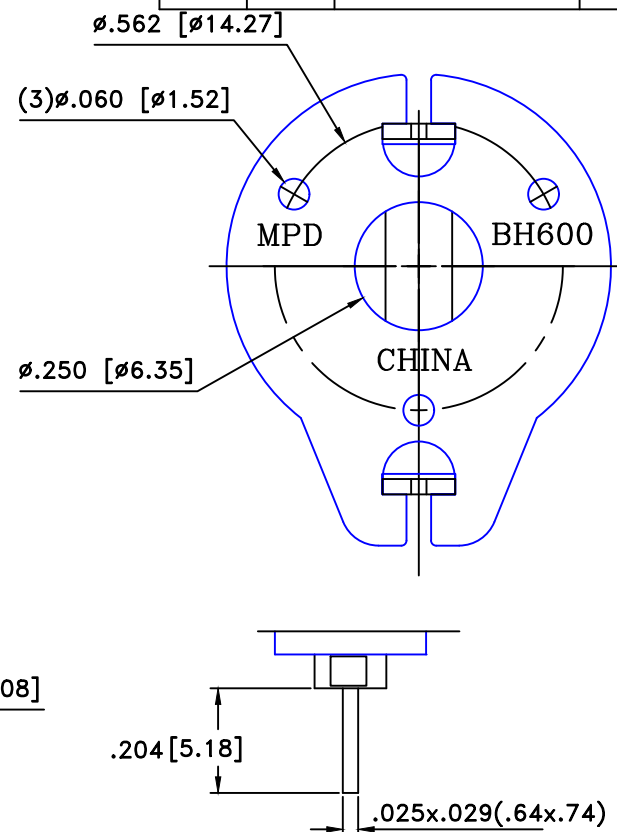

SPECIFICATIONS

- *Holder material-thermoplastic, black PBT
- *Flammability rating-UL94V-0, File No.E53664
- *Contacts-302 spring temper stainless steel nickel plated overall
- *Dielectric strenth-560volts/mil at 25°C for 5seconds
- *Temperature range- -55° to +180°C
- *Resistance to solvents-Xylene,ethyl,butyl,methyl&proptl alcohol;ethyl acetate,heptane;toluene;refrigerant
- * Approximate weight: 1.85g
- *ROHS COMPLIANT

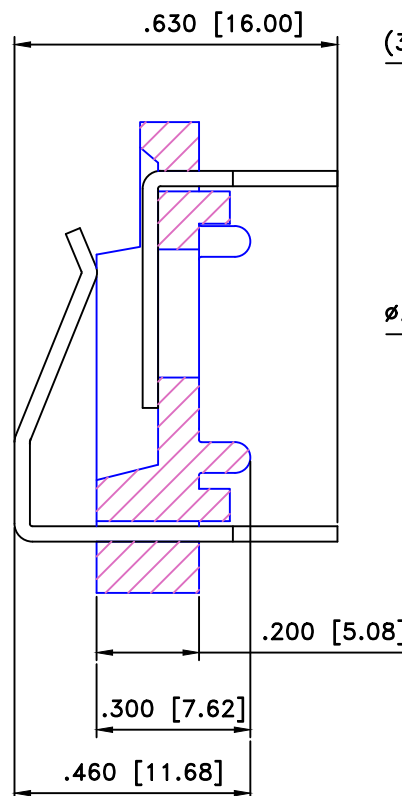

Square Contact Detail

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/29/15	F	UPDATED UL FILE NO.	T.B.	B.S.	
12/12/19	G	ADDED WEIGHT OF THE PART	T.B.	B.S.	
09/14/23	H	UPDATED UL FILE NO.	D.L.	B.S.	

Tolerance (Except as noted)	Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale 4=1	Drawn By T.S. Approved By D.L.
Fractional ± .8 (.030)	Title COIN CELL HOLDER, ø16mm by 5.8mm TALL OR VARTA V80H BATTERIES		
Angular ± 3°	Date 09/14/23	Drawing Number BH600-5.8	