
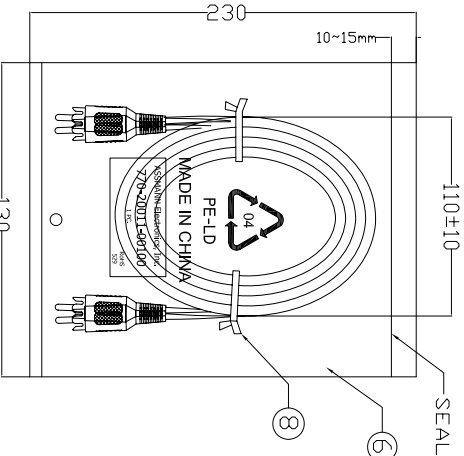
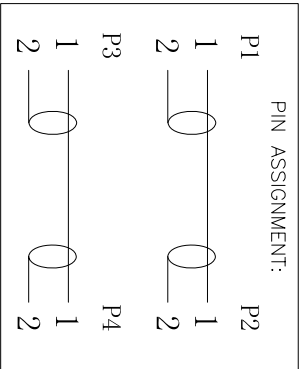


Units:mm

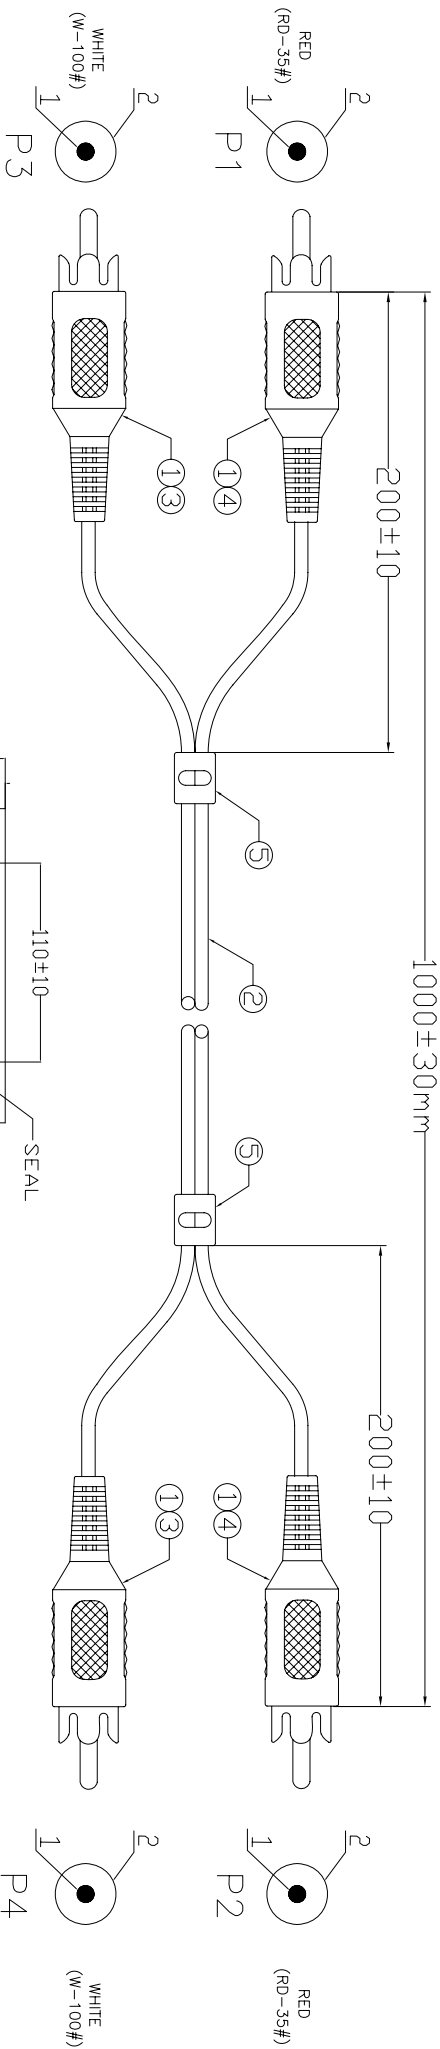

Electrical test:
1.100% short,open,miswire test
2.Conduct resistance:5 Ohm(max)
3.Insulation resistance:10Mohm(min)
4.dielectric test:DC 300V




⑧	TIE	2	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
③	OUT JACKET	6.6g	PVC-40P RED(RD-35),(Mould NO.:WM-009)
②	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
①	OUT JACKET	6.6g	PVC-40P WHITE(W-100)(Mould NO.:WM-009)
①	CABLE	1	NOUL 28#(10/0.10*28/0.10)*2F JACKET BLACK OD2.8*5.6mm
①	CONN	4	RCA PLUG MALE 梅花型 TYPE NI-PLATED INSULATOR COLOR:BROWN
4	NAME	QTY	SPECIFICATION

NOTE:
1.小PE袋大PE袋对应料号,包袋数量及时间印刷样式:
CnC Tech, LLC
Industrial Cable and Connector Technology
770-20011-00100
10PCS
529
印袋人"单料号"
印对应的数量
表示529099(每袋次"产品"在"周"印刷)

2.外箱两个侧面ITEM NO后面各贴一个35*22mm ROHS标签.

CnC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY	LICHENG	DRAWING NO.	V6/LJ0-094-082-A
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20011-00100
DECIDE BY		DATE	2012-12-28
VERSION/EDITION	A/0	PROJECTION	

Units:mm

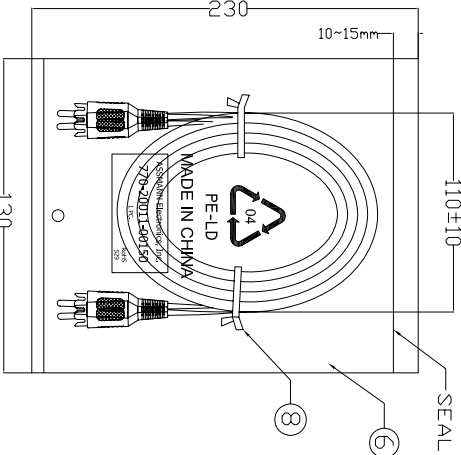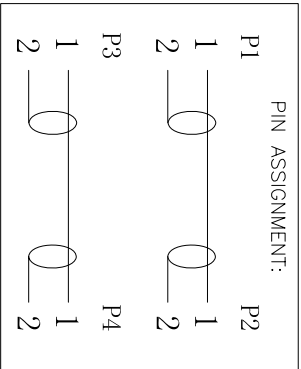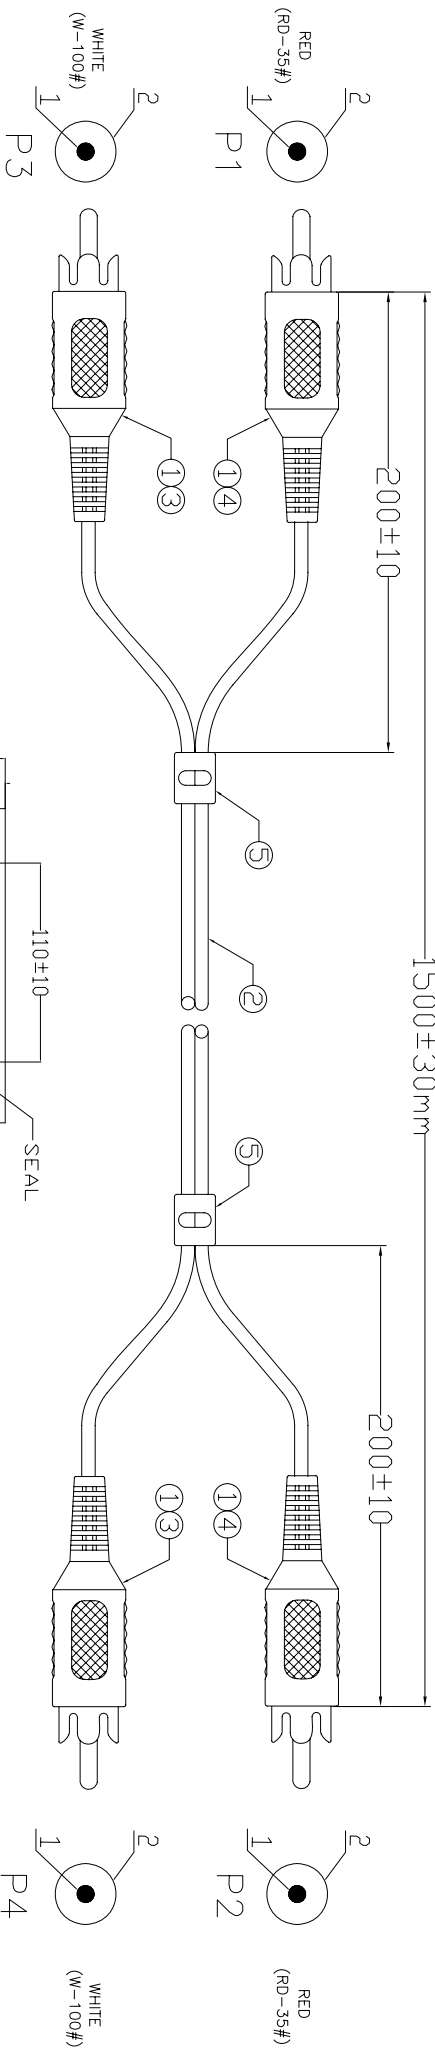

Electrical test:
1.100% short,open,miswire test
2.Conduct resistance:5 Ohm(max)
3.Insulation resistance:10Mohm(min)
4.dielectric test:DC 300V




⑧	TIE	2	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
③	OUT JACKET	6.6g	PVC-40P RED(RD-35),(Mould NO.WM-009)
②	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
①	OUT JACKET	6.6g	PVC-40P WHITE(W-100)(Mould NO.WM-009)
①	CABLE	1	NOUL 28#(10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
①	CONN	4	RCA PLUG MALE 梅花型 TYPE NI-PLATED INSULATOR COLOR:BROWN
4	NAME	QTY	SPECIFICATION

NOTE:
1.小PE袋大PE袋对应料号,包袋数量及时间印刷样式:
CnC Tech, LLC
Industrial Cable and Connector Technology
770-20011-00150
10PCS
529
印袋人"产品料号
印对应的数量
表示529099(每袋次"产品生产周期印)

2.外箱两个侧面ITEM NO后面各贴一个35*22mm ROHS标签.

CnC Tech, LLC				
Industrial Cable and Connector Technology				
DRAWN BY	LICHENG	DRAWING NO.	V6/LJ0-094-082-B	
CHECKED BY		CUSTOMER	CNC	
APPROVAL BY		ITEM NO.	770-20011-00150	
DECIDE BY		DATE	2012-12-28	
VERSION/EDITION	A/0	PROJECTION		

Units:mm

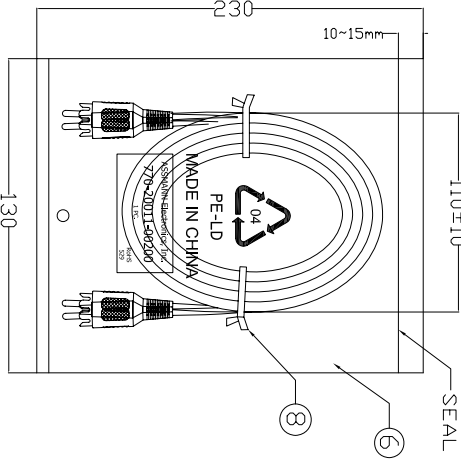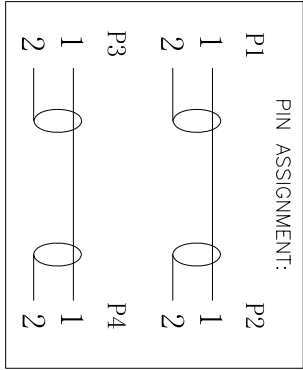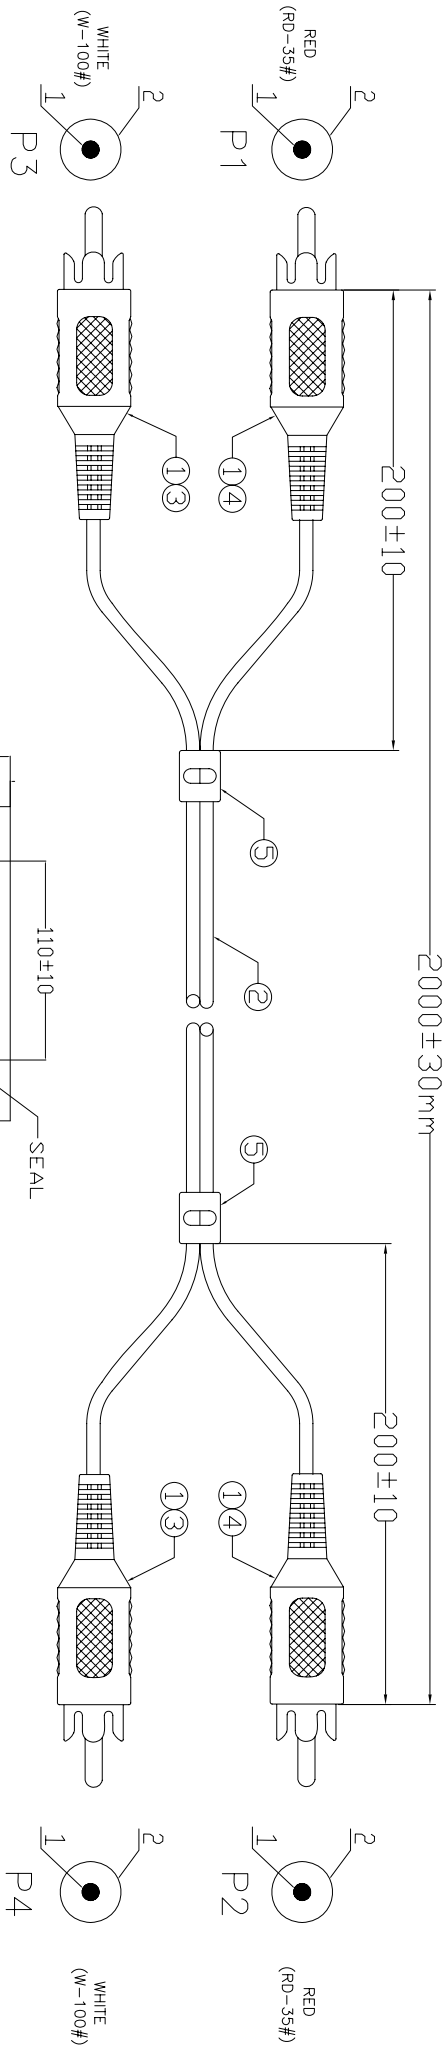

- Electrical test:
- 1.100% short,open,miswire test
 - 2.Conduct resistance:5 Ohm(max)
 - 3.Insulation resistance:10Mohm(min)
 - 4.dielectric test:Dc 300V

⑧	TIE	2	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
③	OUT JACKET	6.6g	PVC-40P RED(RD-35),(Mould NO.WM-009)
②	OUT JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
①	CABLE	1	NOUL 28#(10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
①	CONN	4	RCA PLUG MALE 梅花型 TYPE NI-PLATED INSULATOR COLOR:BROWN
4	NAME	QTY	SPECIFICATION

Cnc Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY	LICHENG	DRAWING NO.	V6/LJ0-094-082-C
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20011-00200
DECIDE BY		DATE	2012-12-28
VERSIONS/EDITION	A/0	PROJECTION	

NOTE:
1.小PE袋/大PE袋对应料号,包袋数量及时间印刷样式:

Cnc Tech, LLC		Industrial Cable and Connector Technology	
770-20011-00200		10 PCS	
RoHS		529	
770-20011-00200		RoHS	
770-20011-00200		RoHS	

2.外箱两个侧面ITEM NO后面各贴一个35*22mm ROHS标签。




4

3

2

1

Units:mm

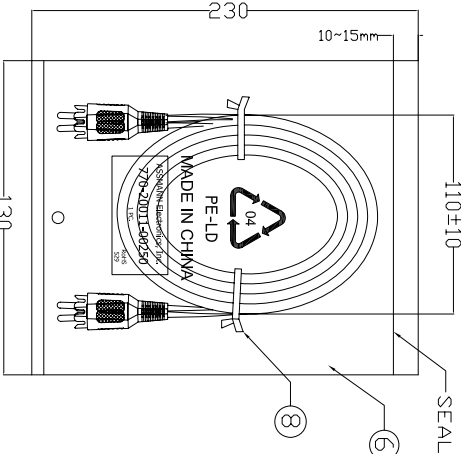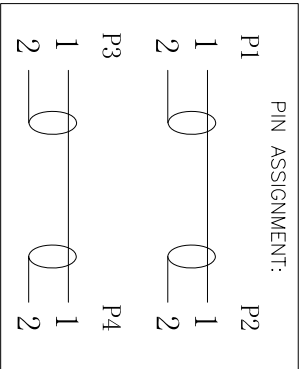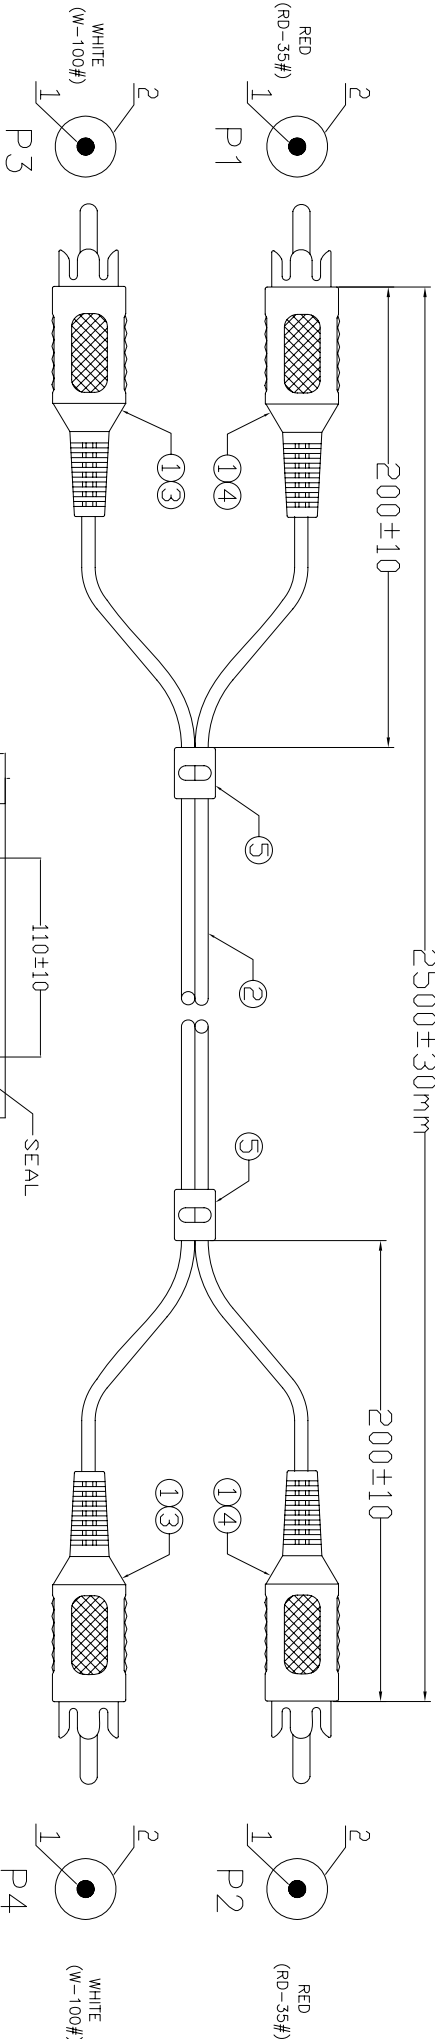

- Electrical test:
- 1.100% short, open, miswire test
 2. Conduct resistance: 5 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V


⑧	TIE	2	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
③	OUT JACKET	6.6g	PVC-40P RED(RD-35),(Mould NO.:WM-009)
②	OUT JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
①	CABLE	1	NOUL 28#(10/0.10*28/0.10)*2F JACKET BLACK OD2.8*5.6mm
NO.	CONN	4	RCA PLUG MALE 梅花型 TYPE NI-PLATED INSULATOR COLOR:BROWN
	NAME	QTY	SPECIFICATION

CnC Tech, LLC



Industrial Cable and Connector Technology

DRAWN BY	LICHENG	DRAWING NO.	V6/LJ0-094-082-D
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20011-00250
DECIDE BY		DATE	2012-12-28
VERSIONS/EDITION	A/0	PROJECTION	

Units:mm

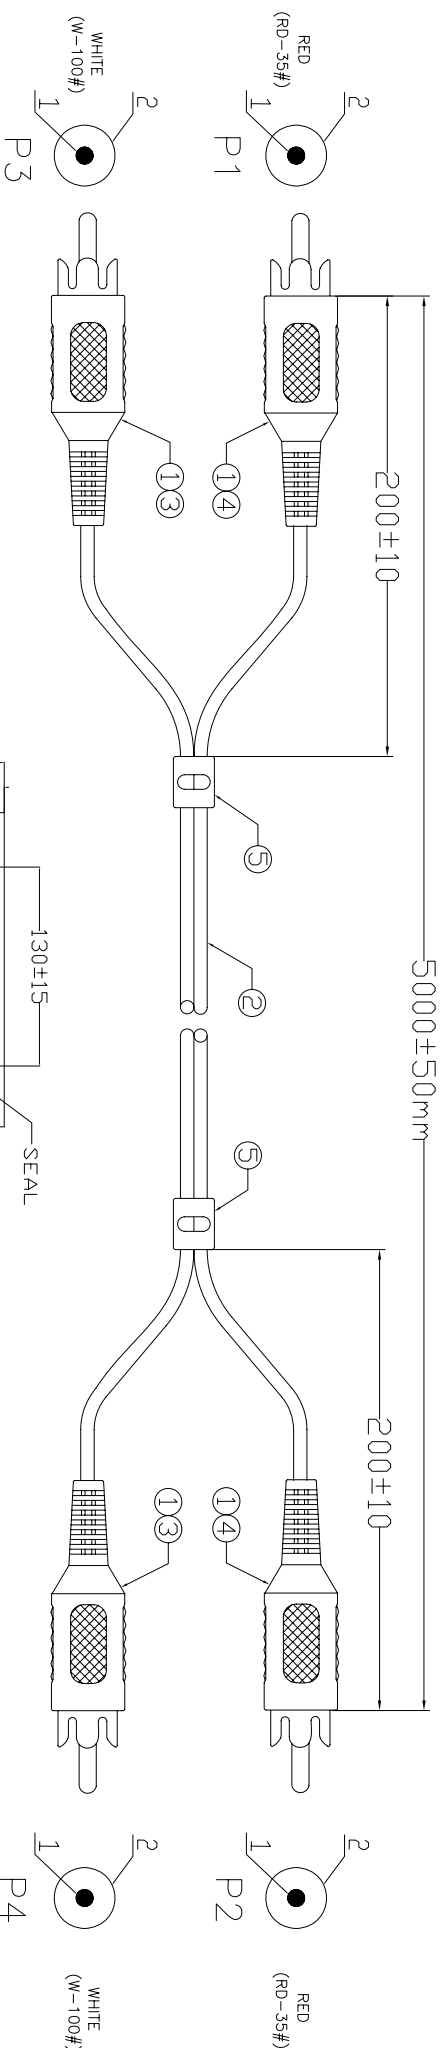

PIN ASSIGNMENT:

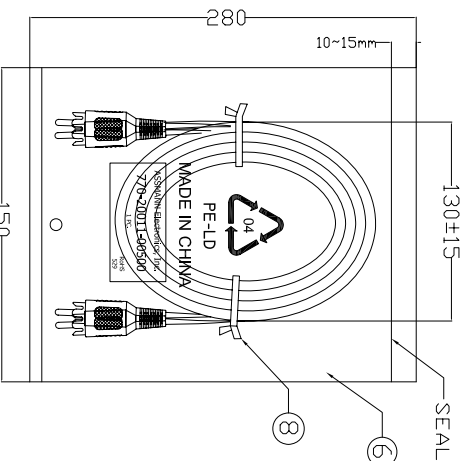

NOTE:

1.小PE袋/大PE袋对应料号.包装袋数量及时间印刷样式:

CnC Tech, LLC	Industrial Cable and Connector Technology
770-20011-00500	_____
5 PCS.	_____
RoHS	_____
529	_____
表示2009年(按首次产品生产期)	_____
印刷的袋装数量	_____
印客人产品料号	_____

2. 外箱两个侧边ITEM NO后面各贴一个35*22mm ROHS标签。


Electrical test:

- 1.100% short, open, miswire test
2. Conduct resistance: 5 Ohm(max)
3. Insulation resistance: 10Mohm(min)
4. dielectric test: DC 300V

⑧	TIE	2	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+ "SPCS"
⑥	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA"+ "1PC"
⑤	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
	OUT JACKET	6.6g	PVC-40P RED(DRD-35),(Mould NO.WM-009)
③	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
	OUT JACKET	6.6g	PVC-40P WHITE(W-100)(Mould NO.WM-009)
②	CABLE	1	NOUL 28#(10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
①	CONN	4	RCA PLUG MALE 梅花型 TYPE IN-PLATED INSULATOR COLOR:BROWN
NO.	NAME	QTY	SPECIFICATION

CNC Tech, LLC

Industrial Cable and Connector Technology


DRAWN BY	LICHENG	DRAWING NO.	VG/LJQ-094-082-E
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20011-00500
DECIDE BY		DATE	2012-12-28
VERSIONS/EDITION	A/0	PROJECTION	

4



C

2

Units:mm

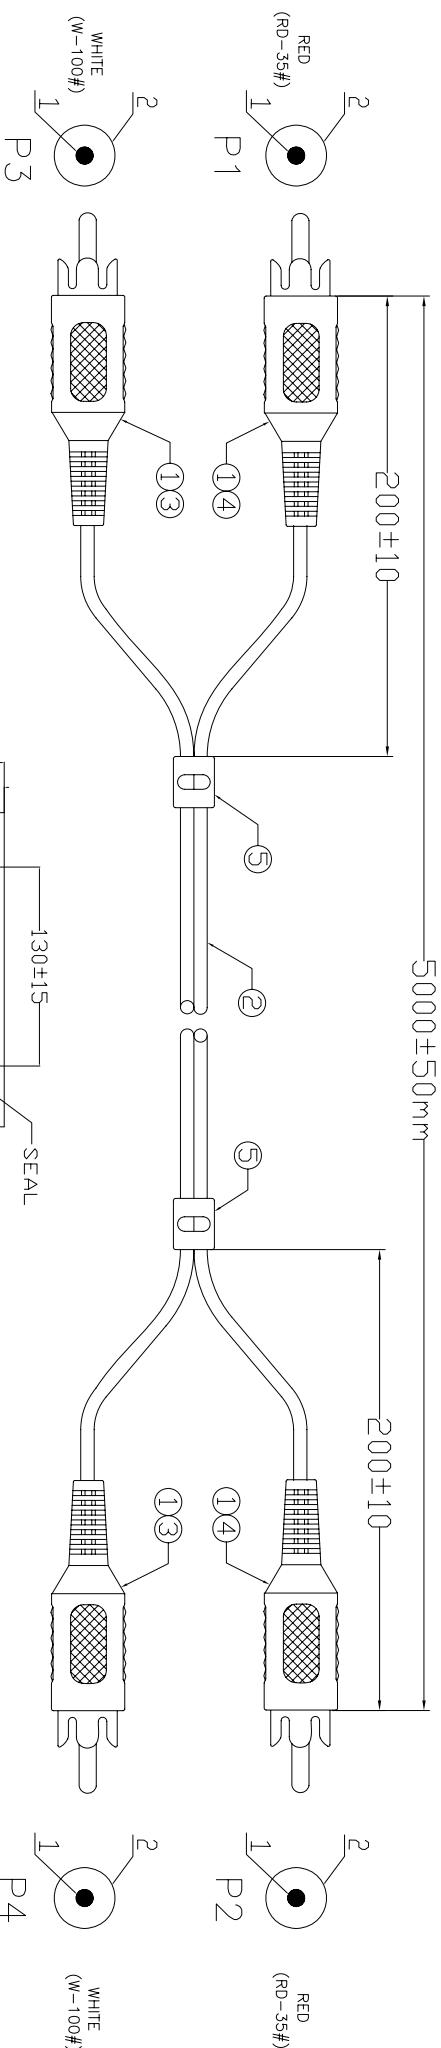

PIN ASSIGNMENT:

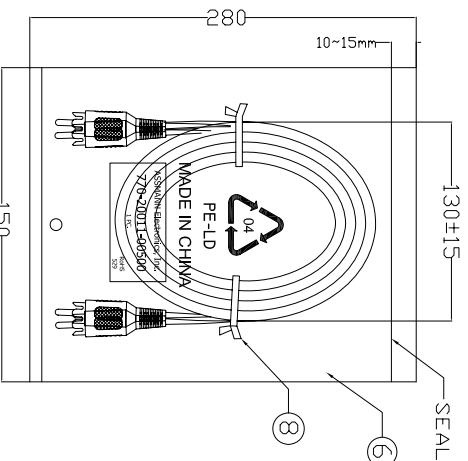

NOTE:

1.小PE袋/大PE袋对应料号.包装袋数量及时间印刷样式:

CnC Tech, LLC	Industrial Cable and Connector Technology
770-20011-00500	_____
5 PCS.	_____
RoHS	_____
529	_____
表示2009年(按首次产品生产期)	_____
印刷的装袋数量	_____
印客人产品料号	_____

2. 外箱两个侧边ITEM NO后面各贴一个35*22mm ROHS标签。

Electrical test:

- 1.100% short, open, miswire test
2. Conduct resistance: 5 Ohm(max)
3. Insulation resistance: 10Mohm(min)
4. dielectric test: DC 300V

⑧	TIE	2	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+ "SPCS"
⑥	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA"+ "1PC"
⑤	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
	OUT JACKET	6.6g	PVC-40P RED(DRD-35),(Mould NO.WM-009)
③	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
	OUT JACKET	6.6g	PVC-40P WHITE(W-100)(Mould NO.WM-009)
②	CABLE	1	NOUL 28#(10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
①	CONN	4	RCA PLUG MALE 梅花型 TYPE IN-PLATED INSULATOR COLOR:BROWN
NO.	NAME	QTY	SPECIFICATION

CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	LICHENG	DRAWING NO.	VG/LJQ-094-082-E
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20011-00500
DECIDE BY		DATE	2012-12-28
VERSIONS/EDITION	A/0	PROJECTION	