



## 1/3-Inch, Wide VGA CMOS Image Sensor

### Equip Your Security Camera to Capture Details in High-Contrast Scenes or Low-Light Conditions, at High or Low Temperatures

#### Features

- DigitalClarity® CMOS imaging technology
- Wide VGA format, 752H x 480V
- 1/3-inch optical format
- 6 $\mu$ m x 6 $\mu$ m pixel size
- Monochrome or color: near-IR enhanced performance for use with non-visible NIR illumination
- Progressive or interlaced readout modes
- 2x2 and 4x4 binning at full 60 fps resolution
- Global shutter photodiode pixels; simultaneous integration and readout
- Simple two-wire serial interface
- On-chip, 10-bit analog to digital converter (ADC), column-parallel with option to operate in 12-bit to 10-bit companding mode
- Support for four unique serial control register IDs to control multiple imagers on the same bus

#### Wide Dynamic Range Imager

The focus for security cameras has shifted from low light sensitivity to wide dynamic range. The ability to adjust for the high contrast of both light and dark in the same frame is particularly important for cameras that operate in uncontrolled lighting conditions. Micron's 1/3-inch wide VGA CMOS image sensor with 100dB dynamic range enables cameras to capture scenes containing both low light levels (down to sub-0.1 lux) and direct sunlight for clear identification of scenes and stills on e-mail or through remote viewing.

With its broad temperature range and enhanced near infrared sensitivity, the MT9V032 performs superbly under low-light conditions and in extremely low to very high temperature. The MT9V032 functions brilliantly at -30°C to +70°C, while its sister part, the MT9V022, operates within an even wider, -40°C to +85°C temperature range. Both devices can withstand storage temperatures up to +125°C.

#### Best-in-Class Performance

This wide VGA CMOS active-pixel digital image sensor with global shutter also features DigitalClarity, Micron's breakthrough, low-noise CMOS imaging technology that achieves CCD image quality (based on signal-to-noise ratio and low-light sensitivity) while maintaining the inherent size, cost, and integration advantages of CMOS.

The MT9V032 also incorporates sophisticated camera functions on-chip, such as 2x2 and 4x4 binning to improve sensitivity when operating at smaller resolutions, as well as windowing, and column and row mirroring. The device is programmable through a simple two-wire serial interface.

Micron's MT9V032 CMOS image sensor provides the best of both worlds: best-in-class performance and low-cost video for home and commercial security system applications—especially those that use cameras in the uncontrolled lighting conditions of real-world environments.

#### Applications

- 802.11 wireless network cameras
- Power line modem cameras
- IP cameras
- uPNP AVs
- WiFi, UWB cameras
- Small office monitoring
- Home monitoring

#### The Right Manufacturer for Designers Who Expect More

With Micron, you get design expertise plus the advantages that come with in-house fabrication. Because we control the parts we manufacture, we can be that



much more responsive to our customers' needs. And because we have manufacturing, design, and sales and marketing facilities throughout the world, we're able to better serve you wherever you do business.

To find out more about how Micron's MT9V032 can streamline your designs and improve your customers' security systems, call us at +1 208-368-3900 or visit us on the Web at [www.micron.com/imaging](http://www.micron.com/imaging).


## Specifications

● <b>Pixel Size:</b>	6 $\mu$ m x 6 $\mu$ m	● <b>ADC:</b>	10-, 8-bit, selectable
● <b>Array Format (active):</b>	752H x 480V	● <b>Data Rate:</b>	26.6 megapixels per second (master clock, 26 MHz)
● <b>Imaging Area:</b>	4.55mm x 2.97mm	● <b>Responsivity:</b>	4.8 V/lux-sec (550nm)
● <b>Color Filter Array:</b>	Monochrome or RGB Bayer color filters	● <b>Minimum Detectable Light:</b>	sub-0.1 lux (mono), 5 lux (color)
● <b>Optical Format:</b>	1/3-inch	● <b>Lag:</b>	0.5%, 0%–100% of full well
● <b>Frame Rate:</b>	60 fps @ 750H x 480V; higher frame rates at lower resolutions	● <b>Dark Current:</b>	<10% of saturation signal at +85°C
● <b>Dynamic Range:</b>	55–100dB	● <b>Spectral Range:</b>	450–1,050nm
● <b>Shutter:</b>	TrueSNAP™ simultaneous integrate and readout global shutter	● <b>Quantum Efficiency:</b>	>35% (@ 850nm)
● <b>Data Format:</b>	Parallel/LVDS (serial), selectable, 10 to 8 bits	● <b>Conversion Gain:</b>	30 uV/e-
● <b>Window Size:</b>	Programmable to any size (e.g., QVGA, CIF, QCIF, etc.)	● <b>Pixel Read Noise:</b>	<25e-
● <b>Scan Mode:</b>	Progressive or interlaced	● <b>Supply Voltage:</b>	3.0–3.6V (3.3V nominal)
● <b>Automatic and Programmable Functions:</b>	Regionally weighted exposure, black level offset correction, horizontal blanking, vertical blanking, lighting control, left-right and top-bottom image reversal, windowing, regional gain, image decimation	● <b>Power Consumption:</b>	<320mW (@ 60 fps), <120 $\mu$ W standby
		● <b>Operating Temp. Range:</b>	–30°C to +70°C (standard) –40°C to +85°C (automotive)
		● <b>Storage Temp. Range:</b>	–55°C to +125°C
		● <b>Package:</b>	48-pin LCC, 52-ball IBGA (wide temperature version), or die

### Single-Frame Capture for Two Resolution Targets at Two Different Light Levels

30,000 lux

2 lux

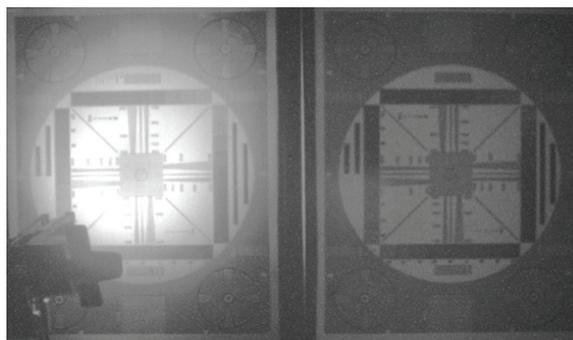

[www.micron.com](http://www.micron.com)

Products are warranted only to meet Micron's production data sheet specifications. Products and specifications are subject to change without notice.

Micron, the Micron logo, DigitalClarity, and TrueSNAP are trademarks of Micron Technology, Inc. All other trademarks are the property of their respective owners. ©2006 Micron Technology, Inc. All rights reserved. 03/21/06 EN.L

