



## 75 VA - CLASS 2 ENERGY LIMITING TRANSFORMERS



- Used in chimes, door bells, security systems, decorative lighting, furnaces, humidifiers, appliances, vending machines, intercom system type applications.
- Rugged, low noise design, indoor use only.
- Stripped wire input (primary) leads, screw terminal output (secondary).
- Mounted on box plate for easy installation.
- Input leads are black 6" minimum, on 240V models 240V lead is red.
- All models are 60 Hz. - limited by built in circuit breaker.
- 16 VAC secondary units are C UL & UL listed
- The 24 VAC secondary units are CSA certified (#LR 3902 Class 2) energy limiting transformer (complies with CSA standard C22.2 #66 part B).

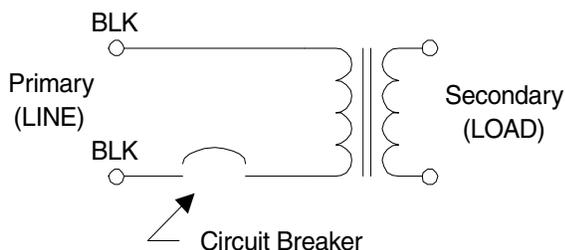

Part No.	A.C. Input (Primary) V (RMS)	A.C. Output Secondary (RMS)		Power Rating VA	Dimensions (Inches)		
		V	A		A	B	C
<b>BF2F</b>	120	16	4.68	75	3.00	2.50	3.75
<b>BF5F</b>	240	16	4.68	75	3.00	2.50	3.75
<b>BF2G</b>	120	24	3.13	75	3.00	2.50	3.75
<b>BF5G</b>	240	24	3.13	75	3.00	2.50	3.75

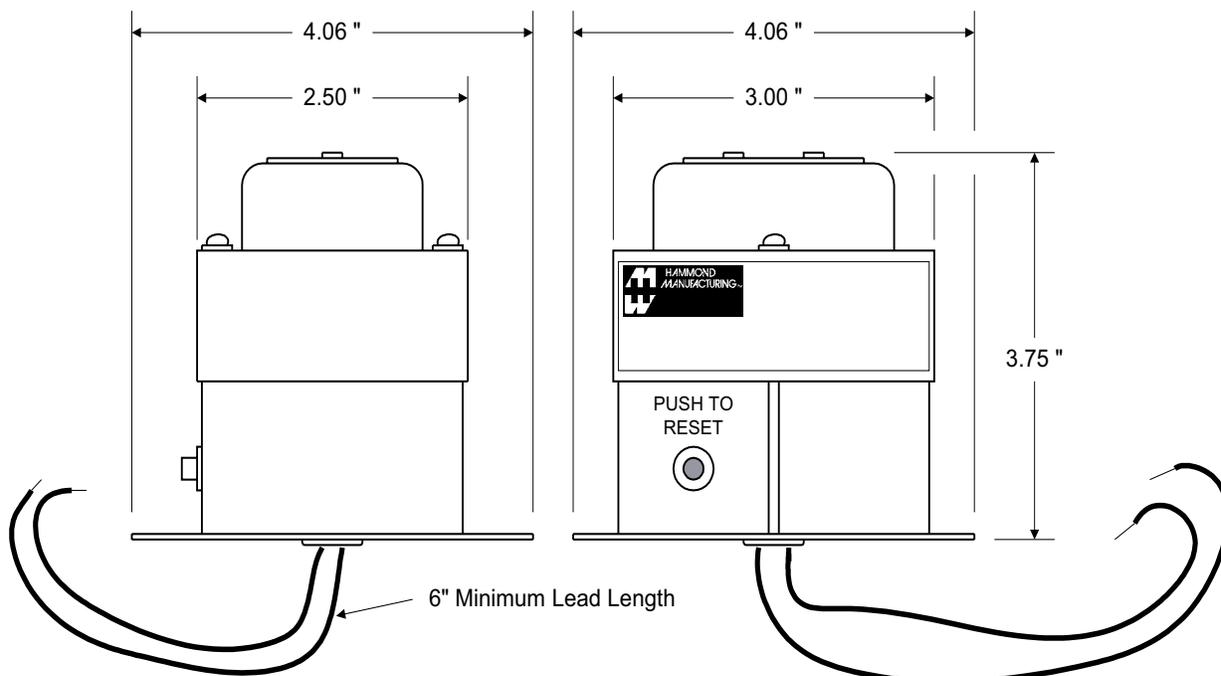

Class 2

### EUROPE

Basingstoke, UK 01256 812812

### AUSTRALIA

Queenstown, Australia 61-8-8240-2244

[www.hammondmfg.com](http://www.hammondmfg.com)



### CANADA

Guelph, Ontario (519) 822-2960  
St. Laurent, Quebec (514) 343-9010

### USA

Cheektowaga, NY (716) 630-7030

