

# NCP603

## LDO Regulator - High Performance, CMOS, Enable, Enhanced ESD

### 300 mA

The NCP603 provides 300 mA of output current at fixed voltage options, or an adjustable output voltage from 5.0 V down to 1.250 V. It is designed for portable battery powered applications and offers high performance features such as low power operation, fast enable response time, and low dropout.


The device is designed to be used with low cost ceramic capacitors and is packaged in the TSOP-5/SOT23-5.

#### Features

- Output Voltage Options:  
Adjustable, 1.3 V, 1.5 V, 1.8 V, 2.5 V, 2.8 V, 3.0 V, 3.3 V, 3.5 V, 5.0 V
- Adjustable Output by External Resistors from 5.0 V down to 1.250 V
- Fast Enable Turn-on Time of 15  $\mu$ s
- Wide Supply Voltage Range Operating Range
- Excellent Line and Load Regulation
- Typical Noise Voltage of 50  $\mu$ V<sub>rms</sub> without a Bypass Capacitor
- Enhanced ESD Protection (HBM 3.5 kV, MM 200 V)
- These are Pb-Free Devices

#### Typical Applications

- SMPS Post-Regulation
- Hand-held Instrumentation & Audio Players
- Noise Sensitive Circuits – VCO, RF Stages, etc.
- Camcorders and Cameras
- Portable Computing

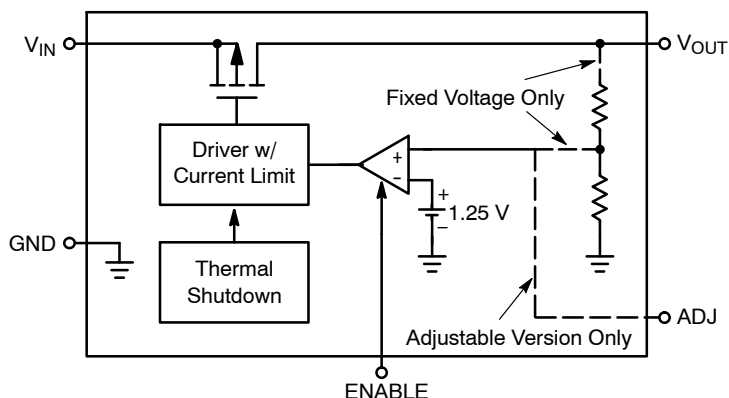


ON Semiconductor®

<http://onsemi.com>



TSOP-5  
SN SUFFIX  
CASE 483


#### MARKING DIAGRAM



xxx = Specific Device Code  
A = Assembly Location  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

#### PIN CONNECTIONS

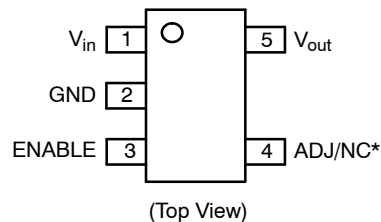

\* ADJ – Adjustable Version  
NC – Fixed Voltage Version

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 12 of this data sheet.

# NCP603

## PIN FUNCTION DESCRIPTION

| Pin No. | Pin Name  | Description                                                                                                                                       |
|---------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | $V_{in}$  | Positive Power Supply Input                                                                                                                       |
| 2       | GND       | Power Supply Ground; Device Substrate                                                                                                             |
| 3       | ENABLE    | The Enable Input places the device into low-power standby when pulled to logic low ( $< 0.4$ V). Connect to $V_{in}$ if the function is not used. |
| 4       | ADJ/NC    | Output Voltage Adjust Input (Adjustable Version), No Connection (Fixed Voltage Versions) (Note 1)                                                 |
| 5       | $V_{out}$ | Regulated Output Voltage                                                                                                                          |

1. True no connect. Printed circuit board traces are allowable.

## ABSOLUTE MAXIMUM RATINGS

| Rating                                    | Symbol                  | Value                                                  | Unit |
|-------------------------------------------|-------------------------|--------------------------------------------------------|------|
| Input Voltage (Note 2)                    | $V_{in}$                | -0.3 to 6.5                                            | V    |
| Output, Enable, Adjustable Voltage        | $V_{out}$ , ENABLE, ADJ | -0.3 to 6.5 (or $V_{in} + 0.3$ )<br>Whichever is Lower | V    |
| Maximum Junction Temperature              | $T_{J(max)}$            | 150                                                    | °C   |
| Storage Temperature                       | $T_{STG}$               | -65 to 150                                             | °C   |
| ESD Capability, Human Body Model (Note 3) | ESD <sub>HBM</sub>      | 3500                                                   | V    |
| ESD Capability, Machine Model (Note 3)    | ESD <sub>MM</sub>       | 200                                                    | V    |
| Moisture Sensitivity Level                | MSL                     | MSL1/260                                               | -    |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

2. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.

3. This device series incorporates ESD protection and is tested by the following methods:

ESD Human Body Model tested per AEC-Q100-002 (EIA/JESD22-A114)

ESD Machine Model tested per AEC-Q100-003 (EIA/JESD22-A115)

Latchup Current Maximum Rating:  $\leq 150$  mA per JEDEC standard: JESD78.

## THERMAL CHARACTERISTICS

| Rating                                                                                   | Symbol          | Value | Unit |
|------------------------------------------------------------------------------------------|-----------------|-------|------|
| Thermal Characteristics, TSOP-5 (Note 4)<br>Thermal Resistance, Junction-to-Air (Note 5) | $R_{\theta JA}$ | 215   | °C/W |

4. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.

5. Value based on copper area of 645 mm<sup>2</sup> (or 1 in<sup>2</sup>) of 1 oz copper thickness.

## OPERATING RANGES (Note 6)

| Rating                                              | Symbol    | Min  | Max | Unit |
|-----------------------------------------------------|-----------|------|-----|------|
| Input Voltage (Note 7)                              | $V_{in}$  | 1.75 | 6   | V    |
| Adjustable Output Voltage (Adjustable Version Only) | $V_{out}$ | 1.25 | 5.0 | V    |
| Output Current                                      | $I_{out}$ | 0    | 300 | mA   |
| Ambient Temperature                                 | $T_A$     | -40  | 125 | °C   |

6. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.

7. Minimum  $V_{in} = 1.75$  V or ( $V_{out} + V_{DO}$ ), whichever is higher.

# NCP603

## ELECTRICAL CHARACTERISTICS

( $V_{in} = 1.750\text{ V}$ ,  $V_{out} = 1.250\text{ V}$ ,  $C_{in} = C_{out} = 1.0\text{ }\mu\text{F}$ , for typical values  $T_A = 25^\circ\text{C}$ , for min/max values  $T_A = -40^\circ\text{C}$  to  $125^\circ\text{C}$ , unless otherwise specified.) (Note 8)

| Characteristic                                       | Symbol         | Test Conditions                                                                                                                                                          | Min              | Typ            | Max              | Unit                |
|------------------------------------------------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------|------------------|---------------------|
| <b>Regulator Output (Adjustable Voltage Version)</b> |                |                                                                                                                                                                          |                  |                |                  |                     |
| Output Voltage                                       | $V_{out}$      | $I_{out} = 1.0\text{ mA to }150\text{ mA}$<br>$V_{in} = 1.75\text{ V to }6.0\text{ V}$ ,<br>$V_{out} = \text{ADJ}$                                                       | 1.231<br>(-1.5%) | 1.250          | 1.269<br>(+1.5%) | V                   |
| Output Voltage                                       | $V_{out}$      | $I_{out} = 1.0\text{ mA to }300\text{ mA}$<br>$V_{in} = 1.75\text{ V to }6.0\text{ V}$ ,<br>$V_{out} = \text{ADJ} = 1.25\text{ V}$                                       | 1.213<br>(-3%)   | 1.250          | 1.287<br>(+3%)   | V                   |
| Power Supply Ripple Rejection (Note 9)               | PSRR           | $I_{out} = 1.0\text{ mA to }150\text{ mA}$<br>$V_{in} = V_{out} + 1\text{ V} + 0.5\text{ V}_{p-p}$<br>$f = 120\text{ Hz}$<br>$f = 1.0\text{ kHz}$<br>$f = 10\text{ kHz}$ | -<br>-<br>-      | 62<br>55<br>38 | -<br>-<br>-      | dB                  |
| Line Regulation                                      | Regline        | $V_{in} = 1.750\text{ V to }6.0\text{ V}$ ,<br>$I_{out} = 1.0\text{ mA}$                                                                                                 | -                | 1.0            | 10               | mV                  |
| Load Regulation                                      | Regload        | $I_{out} = 1.0\text{ mA to }300\text{ mA}$                                                                                                                               | -                | 2.0            | 45               | mV                  |
| Output Noise Voltage (Note 9)                        | $V_n$          | $f = 10\text{ Hz to }100\text{ kHz}$                                                                                                                                     | -                | 50             | -                | $\mu\text{V}_{rms}$ |
| Output Short Circuit Current                         | $I_{sc}$       |                                                                                                                                                                          | 350              | 650            | 900              | mA                  |
| Dropout Voltage<br>1.25 V                            | $V_{DO}$       | Measured at: $V_{out} - 2.0\%$ ,<br>$I_{out} = 150\text{ mA}$ , Figure 2                                                                                                 | -                | 175            | 250              | mV                  |
| Dropout Voltage<br>1.25 V                            | $V_{DO}$       | Measured at: $V_{out} - 2.0\%$ ,<br>$I_{out} = 300\text{ mA}$ , Figure 2                                                                                                 | -                | 375            | 480              | mV                  |
| Output Current Limit (Note 9)                        | $I_{out(max)}$ |                                                                                                                                                                          | 300              | 650            | -                | mA                  |

**Regulator Output (Fixed Voltage Version)** ( $V_{in} = V_{out} + 0.5\text{ V}$ ,  $C_{in} = C_{out} = 1.0\text{ }\mu\text{F}$ , for typical values  $T_A = 25^\circ\text{C}$ , for min/max values  $T_A = -40^\circ\text{C}$  to  $125^\circ\text{C}$ ; unless otherwise noted.) (Note 8)

|                                                                                                 |           |                                                                                                                                                                          |                                                                                        |                                                             |                                                                                        |    |
|-------------------------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------|----------------------------------------------------------------------------------------|----|
| Output Voltage<br>1.3 V<br>1.5 V<br>1.8 V<br>2.5 V<br>2.8 V<br>3.0 V<br>3.3 V<br>3.5 V<br>5.0 V | $V_{out}$ | $I_{out} = 1.0\text{ mA to }150\text{ mA}$<br>$V_{in} = (V_{out} + 0.5\text{ V})\text{ to }6.0\text{ V}$                                                                 | (-2%)<br>1.270<br>1.470<br>1.764<br>2.450<br>2.744<br>2.940<br>3.234<br>3.430<br>4.900 | 1.3<br>1.5<br>1.8<br>2.5<br>2.8<br>3.0<br>3.3<br>3.5<br>5.0 | (+2%)<br>1.326<br>1.530<br>1.836<br>2.550<br>2.856<br>3.060<br>3.366<br>3.570<br>5.100 | V  |
| Output Voltage<br>1.3 V<br>1.5 V<br>1.8 V<br>2.5 V<br>2.8 V<br>3.0 V<br>3.3 V<br>3.5 V<br>5.0 V | $V_{out}$ | $I_{out} = 1.0\text{ mA to }300\text{ mA}$<br>$V_{in} = (V_{out} + 0.5\text{ V})\text{ to }6.0\text{ V}$                                                                 | (-3%)<br>1.261<br>1.455<br>1.746<br>2.425<br>2.716<br>2.910<br>3.201<br>3.395<br>4.850 | 1.3<br>1.5<br>1.8<br>2.5<br>2.8<br>3.0<br>3.3<br>3.5<br>5.0 | (+3%)<br>1.339<br>1.545<br>1.854<br>2.575<br>2.884<br>3.090<br>3.399<br>3.605<br>5.150 | V  |
| Power Supply Ripple Rejection (Note 9)                                                          | PSRR      | $I_{out} = 1.0\text{ mA to }150\text{ mA}$<br>$V_{in} = V_{out} + 1\text{ V} + 0.5\text{ V}_{p-p}$<br>$f = 120\text{ Hz}$<br>$f = 1.0\text{ kHz}$<br>$f = 10\text{ kHz}$ | -<br>-<br>-                                                                            | 62<br>55<br>38                                              | -<br>-<br>-                                                                            | dB |
| Line Regulation                                                                                 | Regline   | $V_{in} = 1.750\text{ V to }6.0\text{ V}$ ,<br>$I_{out} = 1.0\text{ mA}$                                                                                                 | -                                                                                      | 1.0                                                         | 10                                                                                     | mV |
| Load Regulation                                                                                 | Regload   | $I_{out} = 1.0\text{ mA to }150\text{ mA}$<br>$I_{out} = 1.0\text{ mA to }300\text{ mA}$                                                                                 | -<br>-                                                                                 | 2.0<br>2.0                                                  | 30<br>45                                                                               | mV |

8. Performance guaranteed over the indicated operating temperature range by design and/or characterization, production tested at  $T_J = T_A = 25^\circ\text{C}$ . Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.

9. Values based on design and/or characterization.

# NCP603

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 1.750\text{ V}$ ,  $V_{out} = 1.250\text{ V}$  (adjustable version)), ( $V_{in} = V_{out} + 0.5\text{ V}$  (fixed version)),  $C_{in} = C_{out} = 1.0\text{ }\mu\text{F}$ , for typical values  $T_A = 25^\circ\text{C}$ , for min/max values  $T_A = -40^\circ\text{C}$  to  $125^\circ\text{C}$ , unless otherwise specified.) (Note 10)

| Characteristic                                                        | Symbol                | Test Conditions                                                           | Min                   | Typ                             | Max                             | Unit                       |
|-----------------------------------------------------------------------|-----------------------|---------------------------------------------------------------------------|-----------------------|---------------------------------|---------------------------------|----------------------------|
| Output Noise Voltage (Note 11)                                        | $V_n$                 | $f = 10\text{ Hz to }100\text{ kHz}$                                      | –                     | 50                              | –                               | $\mu\text{V}_{\text{rms}}$ |
| Output Short Circuit Current                                          | $I_{\text{sc}}$       |                                                                           | 350                   | 650                             | 900                             | mA                         |
| Dropout Voltage<br>1.3 V<br>1.5 V<br>1.8 V<br>2.5 V<br>2.7 V to 5.0 V | $V_{\text{DO}}$       | Measured at: $V_{\text{out}} - 2.0\%$<br>$I_{\text{out}} = 150\text{ mA}$ | –<br>–<br>–<br>–<br>– | 175<br>150<br>125<br>85<br>75   | 250<br>225<br>175<br>175<br>125 | mV                         |
| Dropout Voltage<br>1.3 V<br>1.5 V<br>1.8 V<br>2.5 V<br>2.7 V to 5.0 V | $V_{\text{DO}}$       | Measured at: $V_{\text{out}} - 2.0\%$<br>$I_{\text{out}} = 300\text{ mA}$ | –<br>–<br>–<br>–<br>– | 375<br>350<br>245<br>187<br>157 | 480<br>400<br>340<br>275<br>230 | mV                         |
| Output Current Limit (Note 11)                                        | $I_{\text{out(max)}}$ |                                                                           | 300                   | 650                             | –                               | mA                         |

## General

|                                        |                  |                                                                                           |       |      |      |                  |
|----------------------------------------|------------------|-------------------------------------------------------------------------------------------|-------|------|------|------------------|
| Disable Current                        | $I_{\text{DIS}}$ | ENABLE = 0 V, $V_{in} = 6\text{ V}$<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$ | –     | 0.01 | 1.0  | $\mu\text{A}$    |
| Ground Current                         | $I_{\text{GND}}$ | ENABLE = 0.9 V,<br>$I_{\text{out}} = 1.0\text{ mA to }300\text{ mA}$                      | –     | 145  | 180  | $\mu\text{A}$    |
| Thermal Shutdown Temperature (Note 11) | $T_{\text{SD}}$  |                                                                                           | –     | 175  | –    | $^\circ\text{C}$ |
| Thermal Shutdown Hysteresis (Note 11)  | $T_{\text{SH}}$  |                                                                                           | –     | 10   | –    | $^\circ\text{C}$ |
| ADJ Input Bias Current                 | $I_{\text{ADJ}}$ |                                                                                           | –0.75 | –    | 0.75 | $\mu\text{A}$    |

## Chip Enable

|                                                                                                   |                     |  |          |        |          |    |
|---------------------------------------------------------------------------------------------------|---------------------|--|----------|--------|----------|----|
| ENABLE Input Threshold Voltage<br>Voltage Increasing, Logic High<br>Voltage Decreasing, Logic Low | $V_{\text{th(EN)}}$ |  | 0.9<br>– | –<br>– | –<br>0.4 | V  |
| Enable Input Bias Current (Note 11)                                                               | $I_{\text{EN}}$     |  | –        | 3.0    | 100      | nA |


## Timing

|                                                           |                 |                          |        |          |          |               |
|-----------------------------------------------------------|-----------------|--------------------------|--------|----------|----------|---------------|
| Output Turn On Time (Note 11)<br>1.25 V to 3.5 V<br>5.0 V | $t_{\text{EN}}$ | ENABLE = 0 V to $V_{in}$ | –<br>– | 15<br>30 | 25<br>50 | $\mu\text{s}$ |
|-----------------------------------------------------------|-----------------|--------------------------|--------|----------|----------|---------------|


10. Performance guaranteed over the indicated operating temperature range by design and/or characterization, production tested at  $T_J = T_A = 25^\circ\text{C}$ . Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.

11. Values based on design and/or characterization.


## NCP603

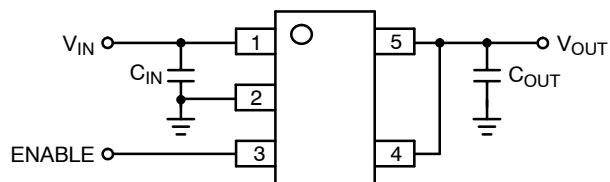

**Figure 2. Typical Application Circuit for  $V_{out} = 1.250\text{ V}$  (Adjustable Version)**

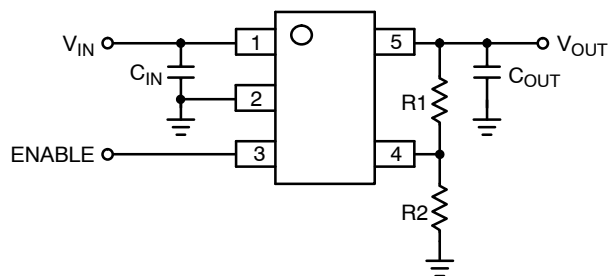

**Figure 3. Typical Application Circuit for Adjustable  $V_{out}$**

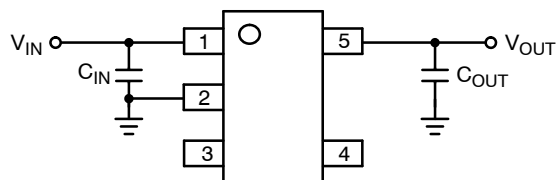

**Figure 4. Typical Application Circuit (Fixed Voltage Version)**

TYPICAL CHARACTERISTICS

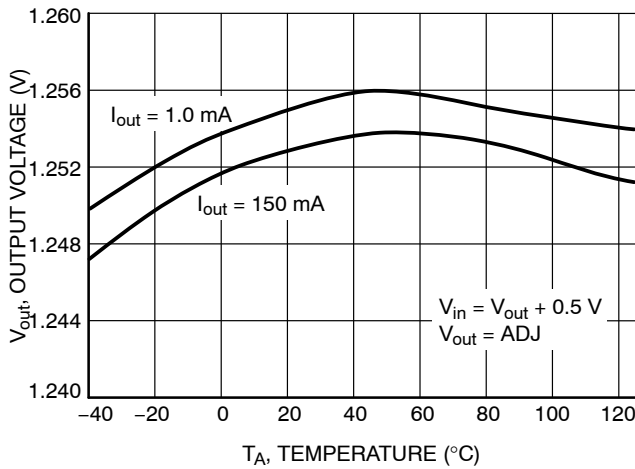


Figure 5. Output Voltage vs. Temperature  
( $V_{in} = V_{out} + 0.5 \text{ V}$ )

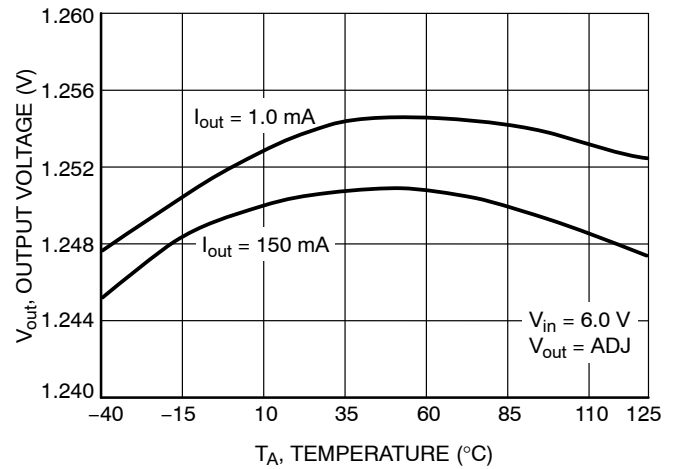


Figure 6. Output Voltage vs. Temperature  
( $V_{in} = 6.0 \text{ V}$ )

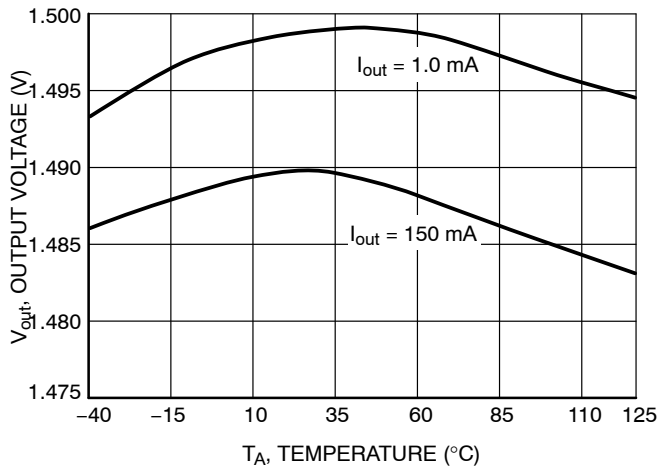


Figure 7. Output Voltage vs. Temperature  
(1.5 V Fixed Output,  $V_{in} = 2 \text{ V}$ )

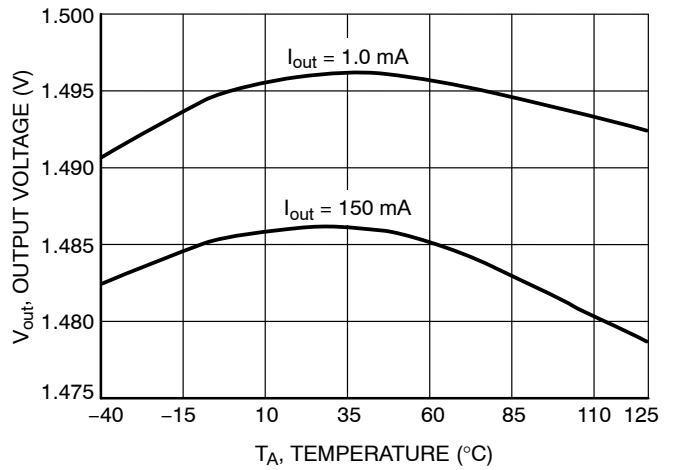


Figure 8. Output Voltage vs. Temperature  
(1.5 V Fixed Output,  $V_{in} = 6 \text{ V}$ )

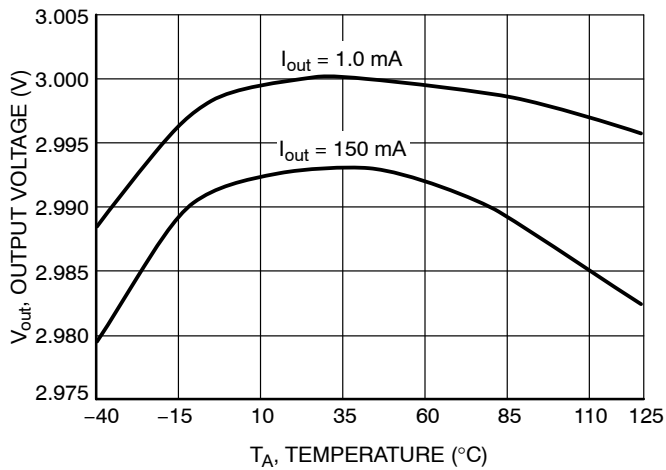


Figure 9. Output Voltage vs. Temperature  
(3.0 V Fixed Output,  $V_{in} = 3.5 \text{ V}$ )

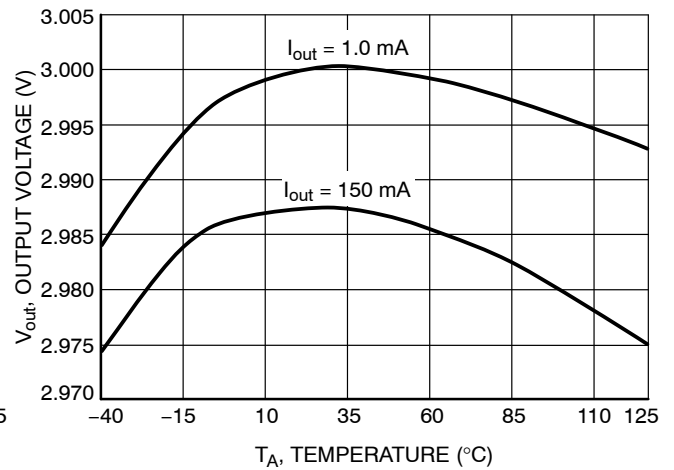


Figure 10. Output Voltage vs. Temperature  
(3.0 V Fixed Output,  $V_{in} = 6 \text{ V}$ )

TYPICAL CHARACTERISTICS

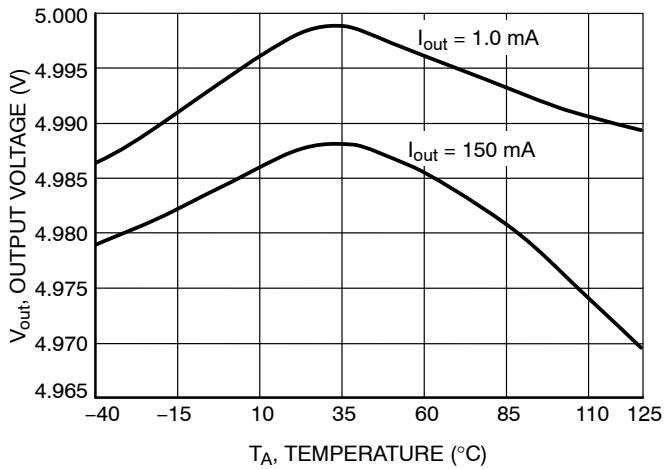


Figure 11. Output Voltage vs. Temperature  
(5.0 V Fixed Output,  $V_{in} = 5.5$  V)

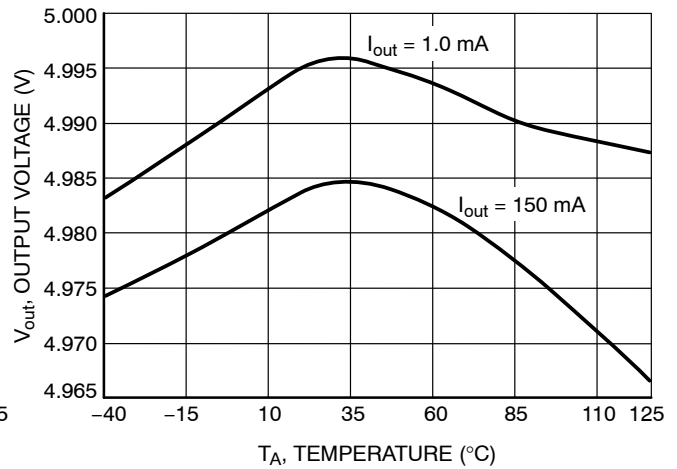


Figure 12. Output Voltage vs. Temperature  
(5.0 V Fixed Output,  $V_{in} = 6$  V)

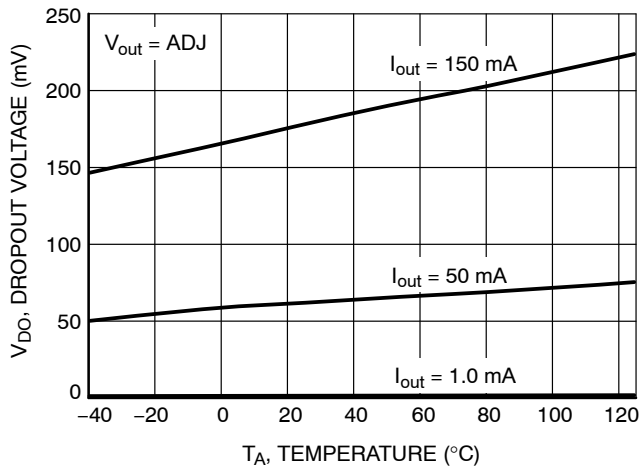


Figure 13. Dropout Voltage vs. Temperature  
(Over Current Range)

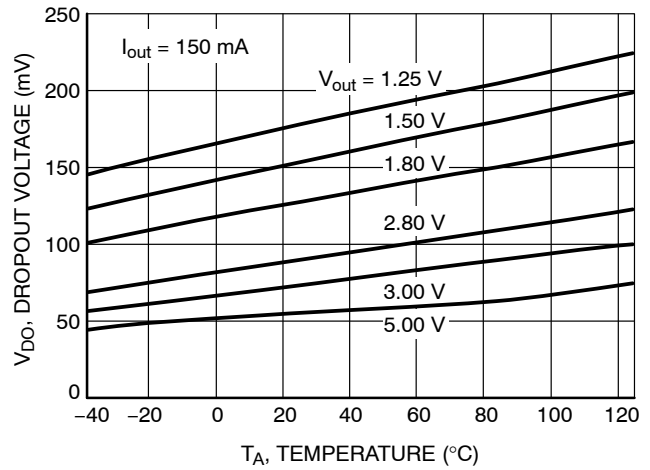


Figure 14. Dropout Voltage vs. Temperature  
(Over Output Voltage)

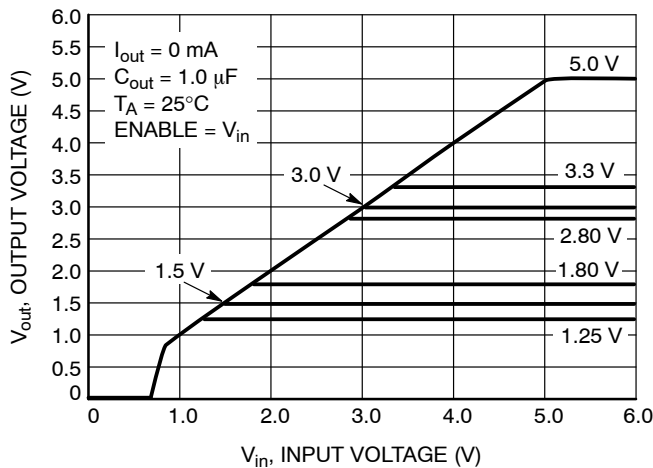


Figure 15. Output Voltage vs. Input Voltage


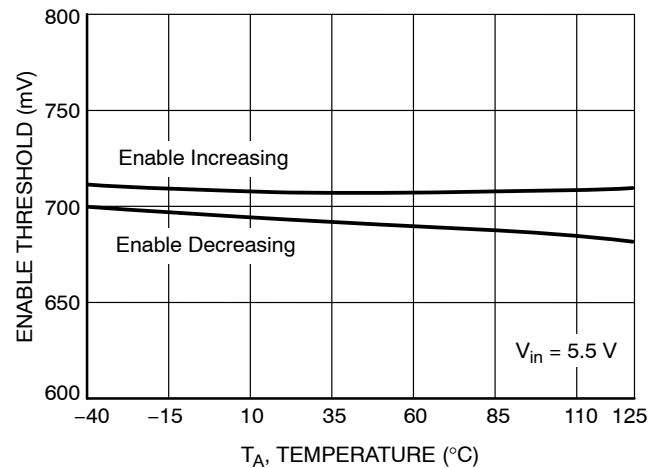



Figure 16. Enable Threshold vs. Temperature

# NCP603


## TYPICAL CHARACTERISTICS

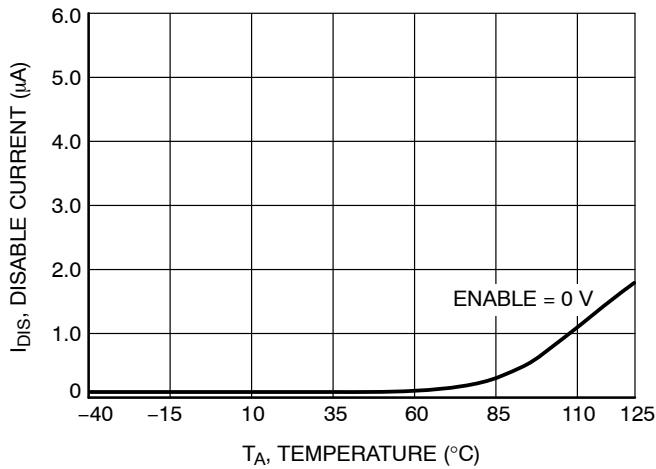


**Figure 17. Ground Current (Sleep Mode) vs. Temperature**

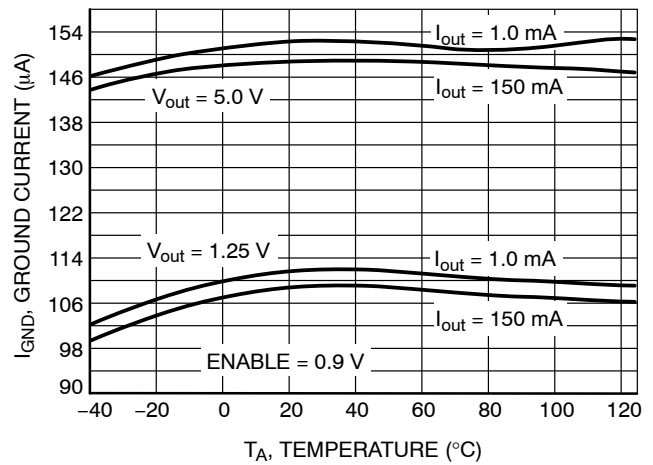


**Figure 18. Ground Current (Run Mode) vs. Temperature**

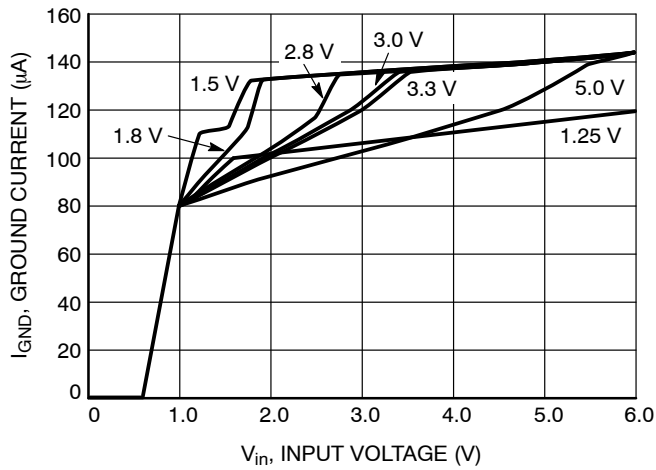

**Figure 19. Ground Current vs. Input Voltage**

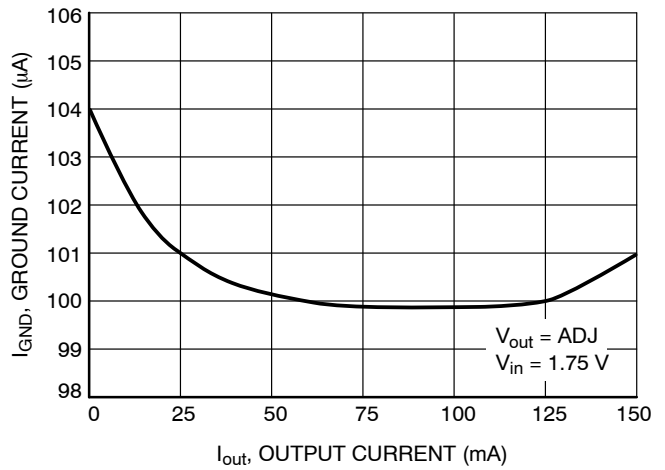

**Figure 20. Ground Current vs. Output Current**

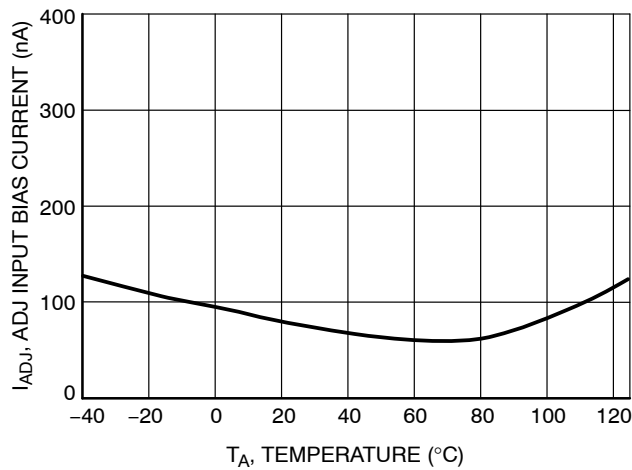

**Figure 21. ADJ Input Bias Current vs. Temperature**

TYPICAL CHARACTERISTICS

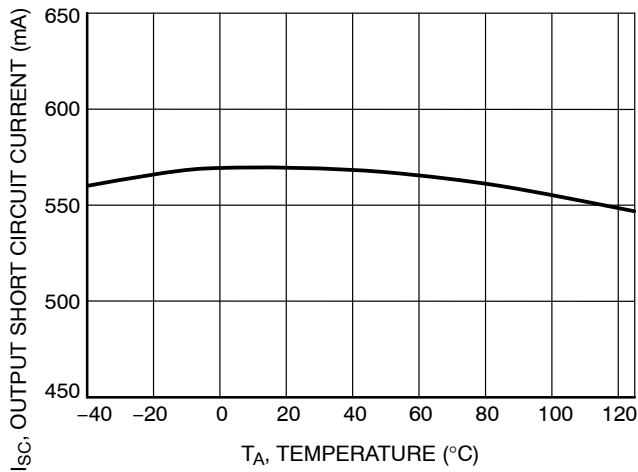


Figure 22. Output Short Circuit Current vs. Temperature

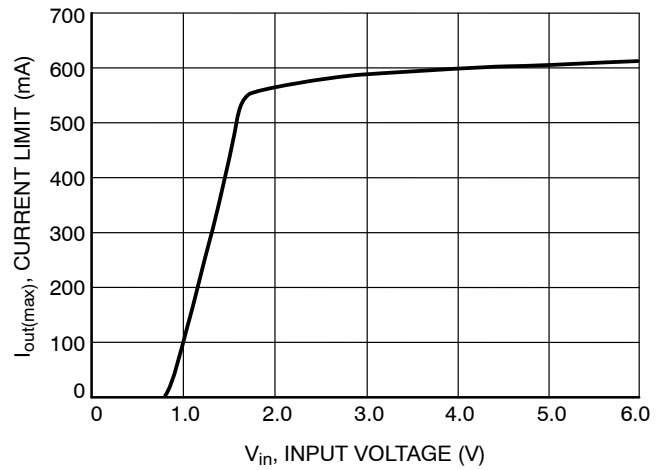


Figure 23. Current Limit vs. Input Voltage

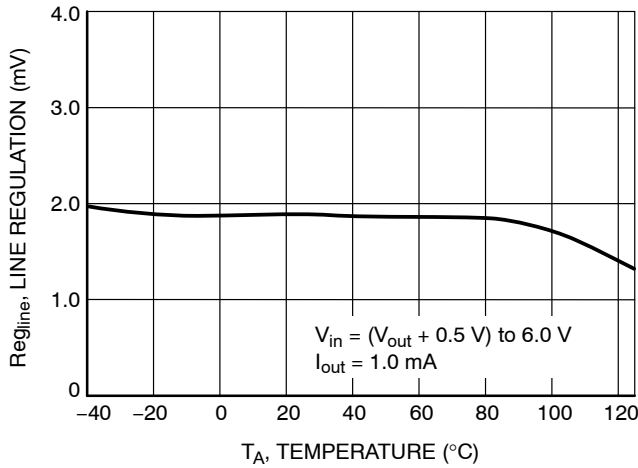


Figure 24. Line Regulation vs. Temperature

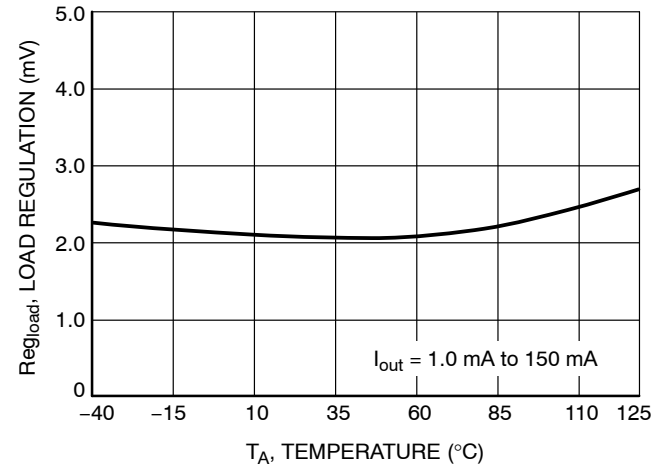


Figure 25. Load Regulation vs. Temperature

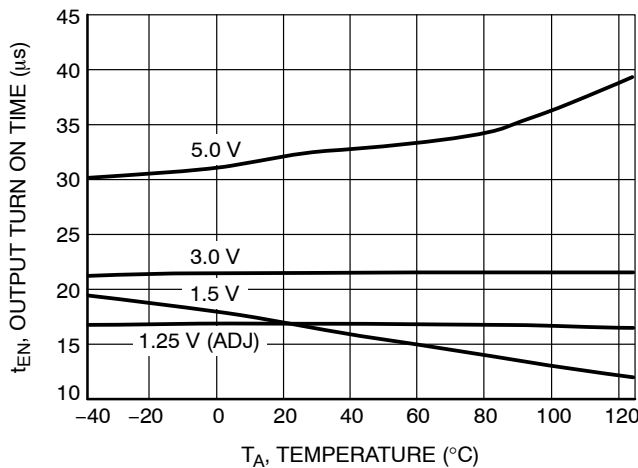


Figure 26. Output Turn On Time vs. Temperature


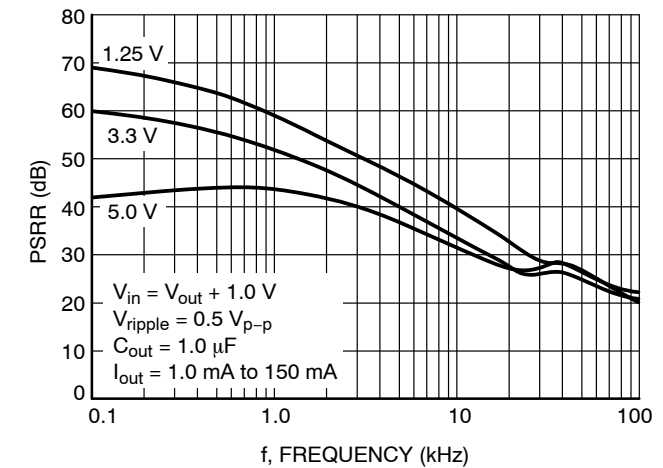



Figure 27. Power Supply Ripple Rejection vs. Frequency

# NCP603


## TYPICAL CHARACTERISTICS

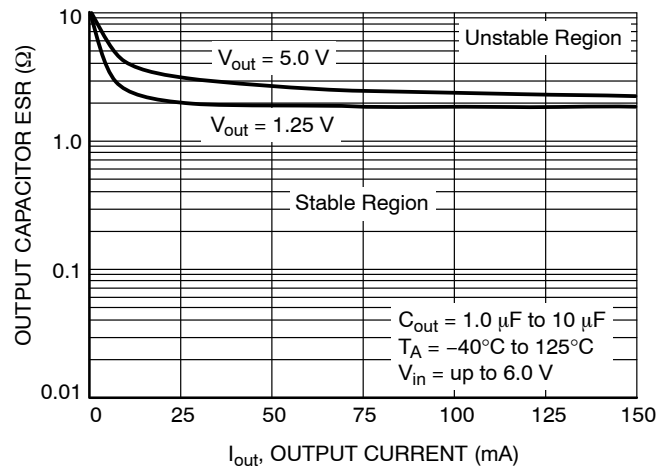

**Figure 28. Output Stability with Output Capacitor ESR over Output Current**

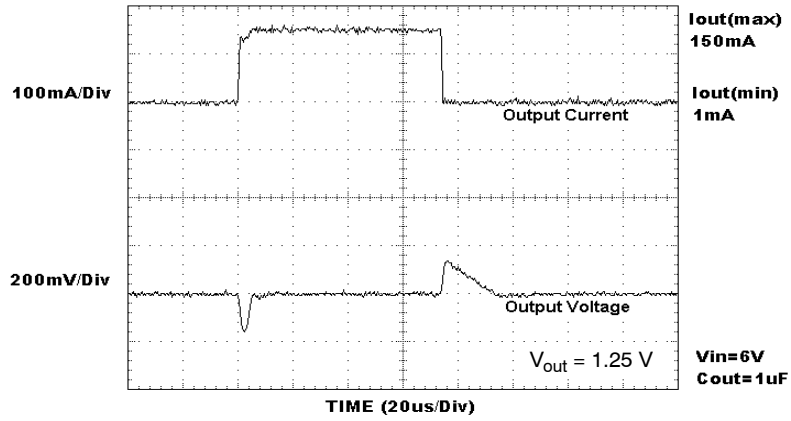

**Figure 29. Load Transient Response ( $1.0\text{ }\mu\text{F}$ )**

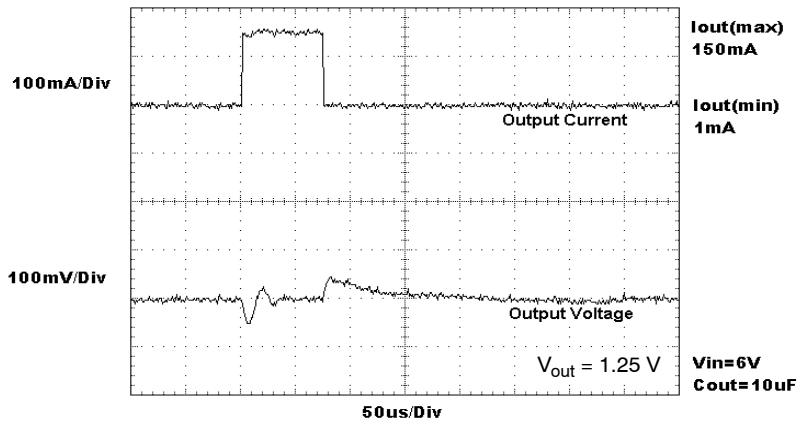

**Figure 30. Load Transient Response ( $10\text{ }\mu\text{F}$ )**

## DEFINITIONS

**Load Regulation**

The change in output voltage for a change in output load current at a constant temperature.

**Dropout Voltage**

The input/output differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 2% below its nominal. The junction temperature, load current, and minimum input supply requirements affect the dropout level.

**Output Noise Voltage**

This is the integrated value of the output noise over a specified frequency range. Input voltage and output load current are kept constant during the measurement. Results are expressed in  $\mu V_{\text{rms}}$  or  $\text{nV} \sqrt{\text{Hz}}$ .

**Ground Current**

Ground Current is the current that flows through the ground pin when the regulator operates without a load on its output ( $I_{\text{GND}}$ ). This consists of internal IC operation, bias, etc. It is actually the difference between the input current (measured through the LDO input pin) and the output load current. If the regulator has an input pin that reduces its internal bias and shuts off the output (enable/disable function), this term is called the standby current ( $I_{\text{STBY}}$ ).

**Line Regulation**

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average junction temperature is not significantly affected.

**Line Transient Response**

Typical output voltage overshoot and undershoot response when the input voltage is excited with a given slope.

**Load Transient Response**

Typical output voltage overshoot and undershoot response when the output current is excited with a given slope between no-load and full-load conditions.

**Thermal Protection**

Internal thermal shutdown circuitry is provided to protect the integrated circuit in the event that the maximum junction temperature is exceeded. When activated at typically  $175^{\circ}\text{C}$ , the regulator turns off. This feature is provided to prevent failures from accidental overheating.

**Maximum Package Power Dissipation**

The power dissipation level at which the junction temperature reaches its maximum operating value.

## APPLICATIONS INFORMATION

The NCP603 series regulator is self-protected with internal thermal shutdown and internal current limit. Typical application circuits are shown in Figures 2 and 3.

**Input Decoupling ( $C_{\text{in}}$ )**

A ceramic or tantalum  $1.0 \mu\text{F}$  capacitor is recommended and should be connected close to the NCP603 package. Higher capacitance and lower ESR will improve the overall line transient response.

**Output Decoupling ( $C_{\text{out}}$ )**

The NCP603 is a stable component and does not require a minimum Equivalent Series Resistance (ESR) for the output capacitor. The minimum output decoupling value is  $1.0 \mu\text{F}$  and can be augmented to fulfill stringent load transient requirements. The regulator works with ceramic chip capacitors as well as tantalum devices. Larger values improve noise rejection and load regulation transient response. Figure 28 shows the stability region for a range of operating conditions and ESR values.

**No-Load Regulation Considerations**

The NCP603 adjustable regulator will operate properly under conditions where the only load current is through the resistor divider that sets the output voltage. However, in the case where the NCP603 is configured to provide a  $1.250 \text{ V}$

output, there is no resistor divider. If the part is enabled under no-load conditions, leakage current through the pass transistor at junction temperatures above  $85^{\circ}\text{C}$  can approach several microamperes, especially as junction temperature approaches  $150^{\circ}\text{C}$ . If this leakage current is not directed into a load, the output voltage will rise up to a level approximately  $20 \text{ mV}$  above nominal.

The NCP603 contains an overshoot clamp circuit to improve transient response during a load current step release. When output voltage exceeds the nominal by approximately  $20 \text{ mV}$ , this circuit becomes active and clamps the output from further voltage increase. Tying the ENABLE pin to  $V_{\text{in}}$  will ensure that the part is active whenever the supply voltage is present, thus guaranteeing that the clamp circuit is active whenever leakage current is present.

When the NCP603 adjustable regulator is disabled, the overshoot clamp circuit becomes inactive and the pass transistor leakage will charge any capacitance on  $V_{\text{out}}$ . If no load is present, the output can charge up to within a few millivolts of  $V_{\text{in}}$ . In most applications, the load will present some impedance to  $V_{\text{out}}$  such that the output voltage will be inherently clamped at a safe level. A minimum load of  $10 \mu\text{A}$  is recommended.

# NCP603

## Noise Decoupling

The NCP603 is a low noise regulator and needs no external noise reduction capacitor. Unlike other low noise regulators which require an external capacitor and have slow startup times, the NCP603 operates without a noise reduction capacitor, has a typical 15  $\mu$ s start up delay and achieves a 50  $\mu$ V<sub>rms</sub> overall noise level between 10 Hz and 100 kHz.

## Enable Operation

The enable pin will turn the regulator on or off. The threshold limits are covered in the electrical characteristics table in this data sheet. The turn-on/turn-off transient voltage being supplied to the enable pin should exceed a slew rate of 10 mV/ $\mu$ s to ensure correct operation. If the enable function is not to be used then the pin should be connected to V<sub>in</sub>.

## Output Voltage Adjust

The output voltage can be adjusted from 1 times (Figure 2) to 4 times (Figure 3) the typical 1.250 V regulation voltage via the use of resistors between the output and the ADJ input. The output voltage and resistors are chosen using Equation 1 and Equation 2.

$$V_{OUT} = 1.250 \left( 1 + \frac{R1}{R2} \right) + (I_{ADJ} \times R1) \quad (\text{eq. 1})$$

$$R1 = R2 \times \left[ \frac{[V_{out} - (I_{ADJ} \times R1)]}{1.25} - 1 \right] \approx R2 \left[ \frac{V_{out}}{1.25} - 1 \right] \quad (\text{eq. 2})$$

Input bias current I<sub>ADJ</sub> is typically less than 150 nA. Choose R2 arbitrarily to minimize errors due to the bias current and to minimize noise contribution to the output voltage. Use Equation 2 to find the required value for R1.

## Thermal

As power in the NCP603 increases, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material, and the ambient temperature affect the rate of junction temperature rise for the part. When the NCP603 has good thermal conductivity through the PCB, the junction temperature will be relatively low with high power applications. The maximum dissipation the NCP603 can handle is given by:

$$P_{D(MAX)} = \frac{T_{J(MAX)} - T_A}{R_{\theta JA}} \quad (\text{eq. 3})$$

Since T<sub>J</sub> is not recommended to exceed 125°C (T<sub>J(MAX)</sub>), then the NCP603 can dissipate up to 465 mW when the ambient temperature (T<sub>A</sub>) is 25°C and the device is assembled on 1 oz PCB with 645 mm<sup>2</sup> area.

The power dissipated by the NCP603 can be calculated from the following equations:

$$P_D \approx V_{IN}(I_{GND@IOUT}) + I_{OUT}(V_{IN} - V_{OUT}) \quad (\text{eq. 4})$$

or

$$V_{IN(MAX)} \approx \frac{P_{D(MAX)} + (V_{OUT} \times I_{OUT})}{I_{OUT} + I_{GND}} \quad (\text{eq. 5})$$

## Hints


V<sub>in</sub> and GND printed circuit board traces should be as wide as possible. When the impedance of these traces is high, there is a chance to pick up noise or cause the regulator to malfunction. Place external components, especially the output capacitor, as close as possible to the NCP603, and make traces as short as possible.

## DEVICE ORDERING INFORMATION

| Device         | Marking Code | Version | Package             | Shipping*        |
|----------------|--------------|---------|---------------------|------------------|
| NCP603SNADJT1G | AAU          | ADJ     | TSOP-5<br>(Pb-Free) | 3000/Tape & Reel |
| NCP603SN130T1G | AAF          | 1.3 V   |                     |                  |
| NCP603SN150T1G | AAV          | 1.5 V   |                     |                  |
| NCP603SN180T1G | AAW          | 1.8 V   |                     |                  |
| NCP603SN250T1G | ACL          | 2.5 V   |                     |                  |
| NCP603SN280T1G | AAX          | 2.8 V   |                     |                  |
| NCP603SN300T1G | AAY          | 3.0 V   |                     |                  |
| NCP603SN330T1G | AAZ          | 3.3 V   |                     |                  |
| NCP603SN350T1G | AA2          | 3.5 V   |                     |                  |
| NCP603SN500T1G | AA3          | 5.0 V   |                     |                  |

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS






**TSOP-5 3.00x1.50x0.95, 0.95P**

**CASE 483**


**ISSUE P**

**DATE 01 APR 2024**

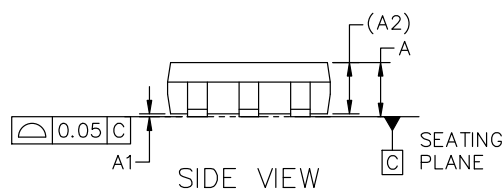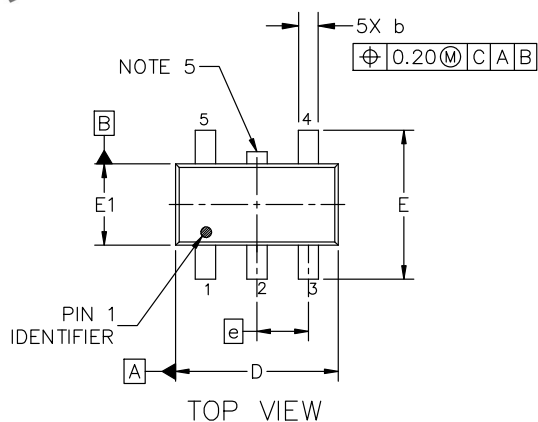


SCALE 2:1

## GENERIC MARKING DIAGRAM\*



**Analog**



**Discrete/Logic**

XXX = Specific Device Code  
A = Assembly Location  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

XXX = Specific Device Code  
M = Date Code  
▪ = Pb-Free Package



(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

## NOTES:

1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2018.
2. ALL DIMENSION ARE IN MILLIMETERS (ANGLES IN DEGREES).
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OF GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSION D.
5. OPTIONAL CONSTRUCTION: AN ADDITIONAL TRIMMED LEAD IS ALLOWED IN THIS LOCATION. TRIMMED LEAD NOT TO EXTEND MORE THAN 0.2 FROM BODY.

| DIM | MILLIMETERS |       |       |
|-----|-------------|-------|-------|
|     | MIN.        | NOM.  | MAX.  |
| A   | 0.900       | 1.000 | 1.100 |
| A1  | 0.010       | 0.055 | 0.100 |
| A2  | 0.950 REF.  |       |       |
| b   | 0.250       | 0.375 | 0.500 |
| c   | 0.100       | 0.180 | 0.260 |
| D   | 2.850       | 3.000 | 3.150 |
| E   | 2.500       | 2.750 | 3.000 |
| E1  | 1.350       | 1.500 | 1.650 |
| e   | 0.950 BSC   |       |       |
| L   | 0.200       | 0.400 | 0.600 |
| θ   | 0°          | 5°    | 10°   |

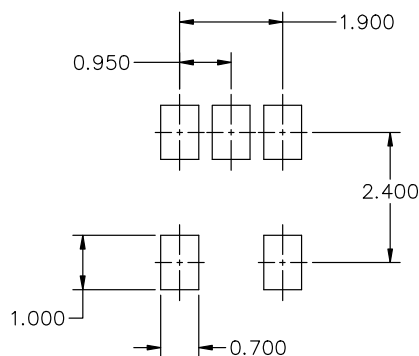

## RECOMMENDED MOUNTING FOOTPRINT\*

\* FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERM/D.

|                         |                                     |                                                                                                                                                                                  |
|-------------------------|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98ARB18753C</b>                  | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>TSOP-5 3.00x1.50x0.95, 0.95P</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)