


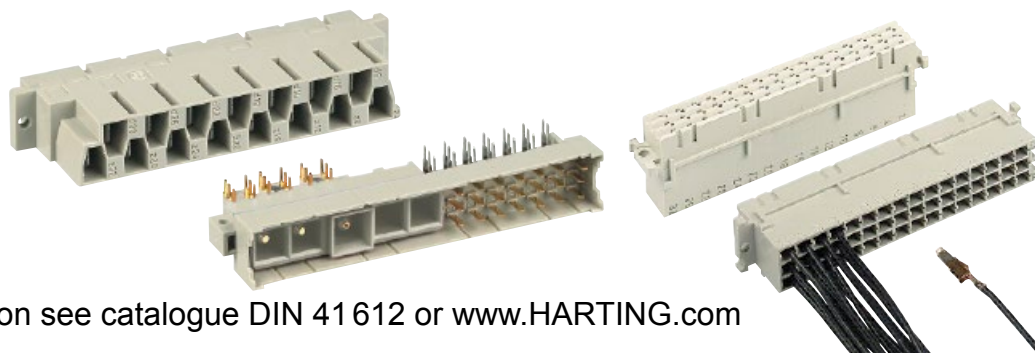

For detailed information see catalogue DIN 41 612 or www.HARTING.com

Type	Maximum number of contacts			Termination							
				Solder	Reflow Soldering (SMC)	Solder lug	Press-in	Crimp	Wire wrap	Faston	Cage clamp
D	32		male	3.0 mm	X						
			female	2.9 mm 4.5 mm		X		X	20.0 mm		
E	48		male	3.0 mm	X						
			female	2.9 mm 4.5 mm		X	4.5 mm 11.5 mm	X	20.0 mm		
			Interface connector I	4.0 mm							
F	48		male	3.0 mm	X						
			female	3.7 mm 4.5 mm		X		X	22.0 mm		
F Low profile	48		female	3.7 mm 4.5 mm			4.5 mm 13.0 mm				
			Interface connector I	3.5 mm				X	22.0 mm		
F 9	9		male					X			
			female					X			
FM	45		male	3.0 mm				X			
			female	4.5 mm				X	22.0 mm		
2 F	24		female					X			
			Interface connector I					X			