

REVISIONS SYM ZONE APPRD. ECN, ERN NO. DATE OCT31/07 L.CHAN PER ECN E07386





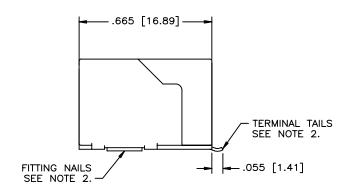

## DATA CONTROL RELEASE

DEPT. NO.--626--BATE: NOV 7,2007

## NOTES:

## 1. MATERIALS:

HOUSING: HIGH TEMPERATURE THERMOPLASITIC.

FLAMMABILITY RATING UL 94V-0

COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATED REFER TO PART NUMBER ON MATING SURFACES.

50 u" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.

100 u" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.

## 2. COPLANARITY SPECIFICATION:

WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING NAILS IS .004 [0.10].

Ε

.250 [6.35] -.050 [1.27] TYP. .025 [0.64] TYP. **\_** .187 [4.75] CONNECTOR .262 [6.65] OUTLINE .665 [16.89] .592 [15.04] .205 [5.21] .100 [2.54] --.260 [6.60] .520 [13.21] --

> RECOMMENDED P.C.B. LAYOUT (COMPONENT SIDE OF BOARD)

AMPHENOL PART NO.: R J L S E - 6  $\times$  0 6 1 - 0 1T

GOLD PLATING -

0 = GOLD FLASH

1 = 15 MICRO" GOLD PLATING 2 = 30 MICRO" GOLD PLATING

3 = 50 MICRO" GOLD PLATING

DRAWN	Chigow	DATE 05/11/17	Ammbanal Canada Cana							
DESIGNED			Amphenol Canada Cor							ο.
CHECKED	PAULW	05/11/17	TITLE OUDS AS MOUNT MODULAR MODE							
I. E. APPRD.			SURFACE MOUNT MODULAR JACK							
Q. A. APPRD.		6 POSITION, 6 CONTACTS, WITHOUT SHIELD,								
DWG. APPRD.		TAPE & REEL PACKAGING-ROHS COMPLIANT								
ENG. REL. NO.			DWG	DRAWING NO.						REV.
REF.				P-RJLSE-6X061-01T					A	
DIMENSION:	S ARE IN [   mm	03554	SCALE		wt		SURF	SHEET	1 of	2

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

