
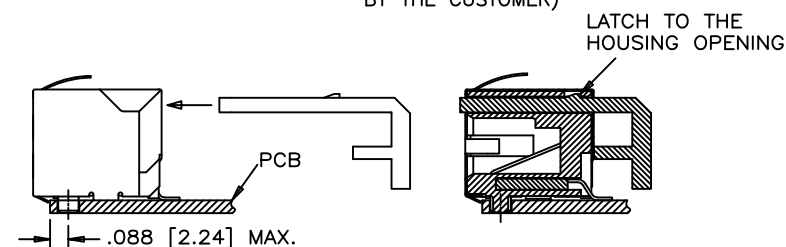
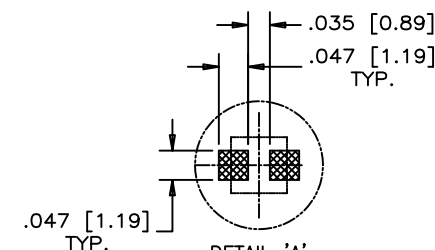
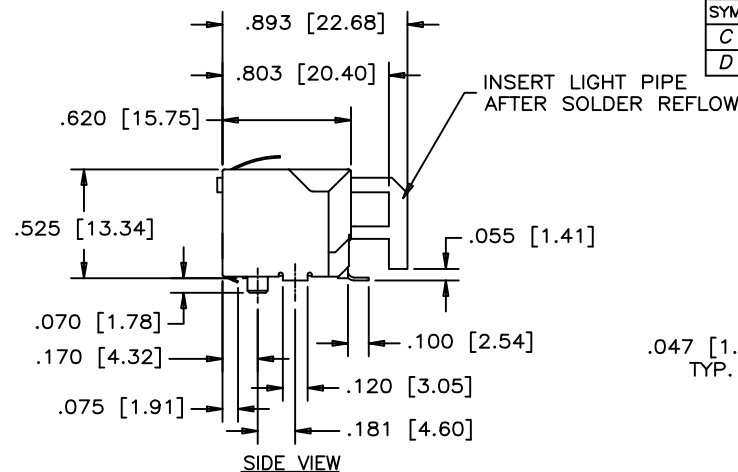


E		F		
REVISONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
C		PROPOSAL	DEC.25/06	L.CHAN
D		SHORTER PCB	APR.16/12	L.CHAN

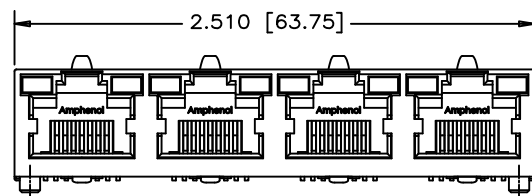

AFTER SOLDER REFLOW, LOAD LIGHT PIPE THROUGH THE CONNECTOR REAR ACCESS IN THE DIRECTION AS SHOWN



MATERIALS:
PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0

CONTACTS: PHOSPHOR BRONZE
PLATING: 20 μ " [0.51 MICRONS]
MIN. GOLD ON MATING SURFACES.
50 μ " [1.27 MICRONS]
MIN. NICKEL UNDERPLATE.
100 μ " [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: COPPER ALLOY
PLATING: NICKEL

LIGHT PIPE: CLEAR POLYCARBONATE
FLAMMABILITY RATING UL 94V-0

AMPHENOL PART NUMBER: RJSSE-5381-04

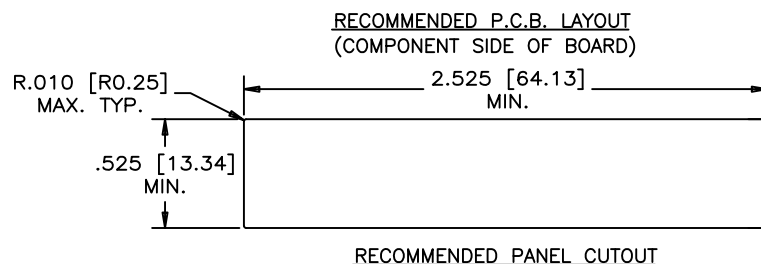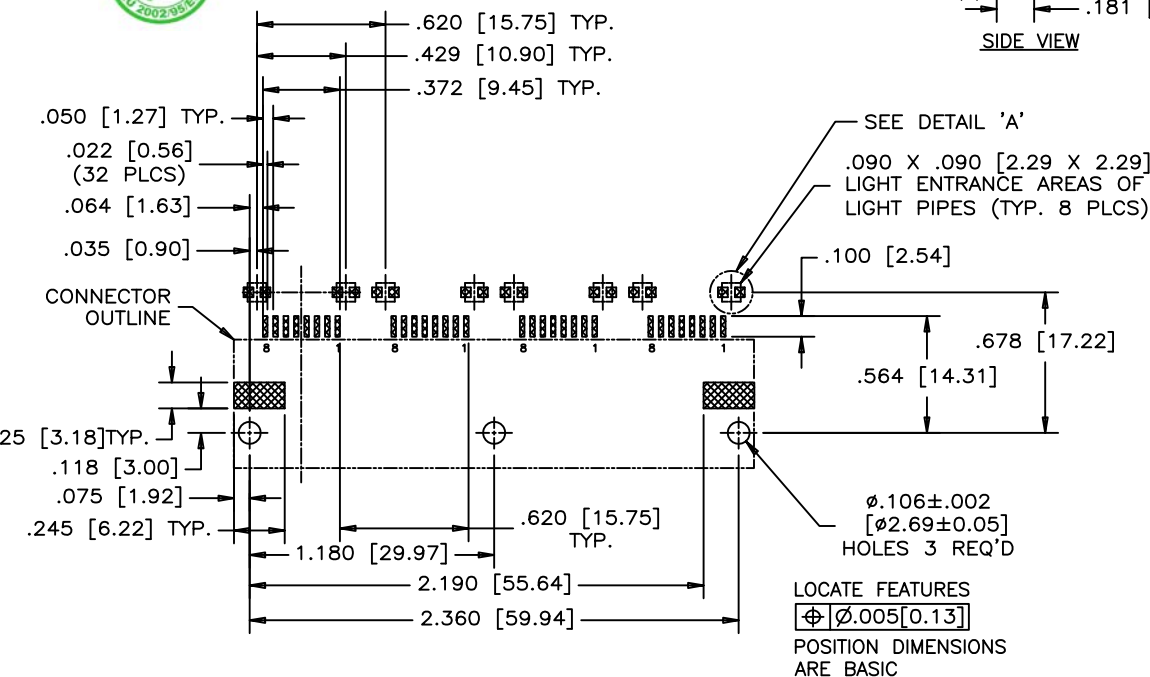

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

MATERIAL -----	DRAWN <i>Chigow Xu</i>	DATE <i>DEC.25/06</i>	Amphenol Canada Corp.						
	DESIGNED								
	CHECKED <i>L.CHAN</i>	<i>DEC.25/06</i>	TITLE 4 PORT SURFACE MOUNT JACK 8 POSITION, 8 CONTACTS, SHIELD, WITH LIGHT PIPES – RoHS COMPLIANT						
	I. E. APPRD.								
Q. A. APPRD.									
FINISH -----	DWG. APPRD.		DWG	DRAWING NO.			P-RJSSE-5381-04		REV.
	ENG. REL. NO.		C						D
	REF.								
	DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554	SCALE	2:1	WT.	-----	SURF.	-----	SHEET 1 OF 1