
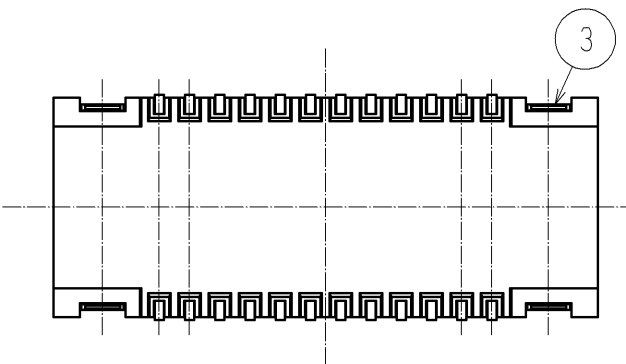
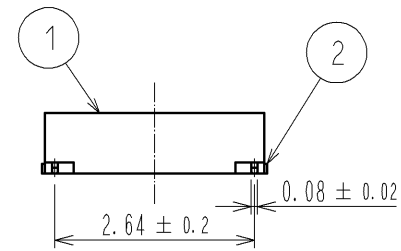
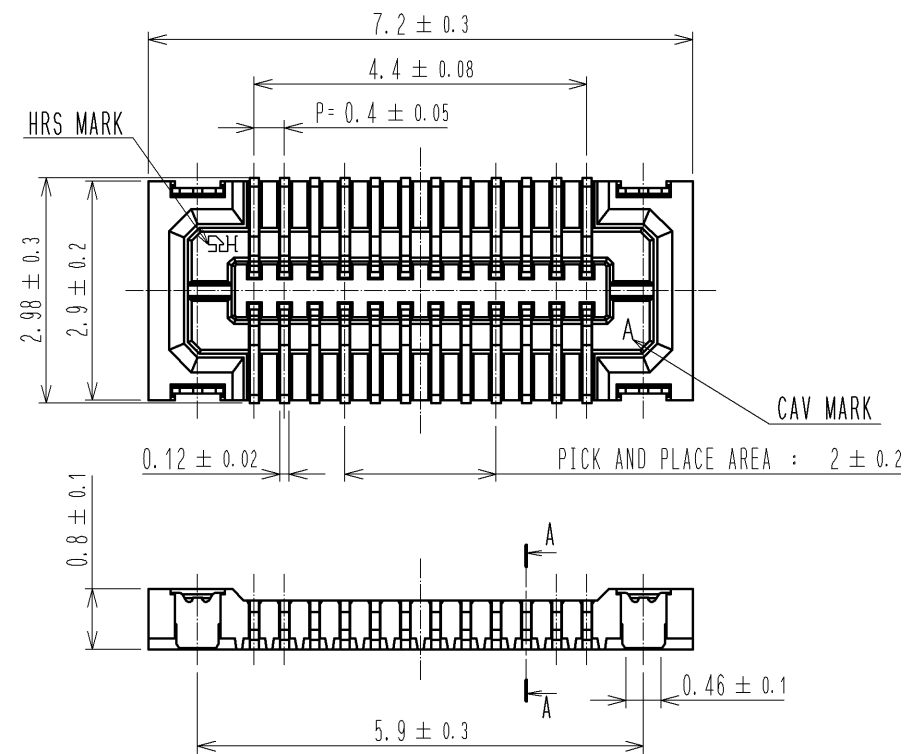


APPLICABLE STANDARD					
RATING	OPERATING TEMPERATURE RANGE	-35°C TO 85°C (NOTES 1)	STORAGE TEMPERATURE RANGE	-10°C TO 60°C	
	VOLTAGE	30V AC	APPLICABLE CONNECTOR	BM10*(0.8)-24DP-0.4V(**)	
	CURRENT	0.3A			
SPECIFICATIONS					
ITEM	TEST METHOD	REQUIREMENTS	QT	AT	
CONSTRUCTION					
GENERAL EXAMINATION	CONFIRMED VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	X	X	
MARKING	CONFIRMED VISUALLY.		X	X	
ELECTRIC CHARACTERISTICS					
CONTACT RESISTANCE	20mV AC OR LESS 1kHz, 1mA.	100mΩ MAX.	X	—	
INSULATION RESISTANCE	100V DC.	50MΩ MIN.	X	—	
VOLTAGE PROOF	100V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	X	—	
MECHANICAL CHARACTERISTICS					
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	① INSERTION FORCE : 27.8 (N) MAX ② WITHDRAWAL FORCE : 5.1 (N) MIN	X	—	
MECHANICAL OPERATION	10 TIMES INSERTIONS AND WITHDRAWALS.	① CONTACT RESISTANCE: 100mΩ MAX. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—	
VIBRATION	FREQUENCY 10 TO 55 TO 10 Hz, APPROX 5min, SINGLE AMPLITUDE 0.75 mm, 10 CYCLES, FOR 3 DIRECTIONS.	① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—	
SHOCK	490 m/s ² DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.	① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—	
ENVIRONMENTAL CHARACTERISTICS					
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55 → 85 °C TIME 30 → 30 min UNDER 5 CYCLES. (RELOCATION TIME TO CHAMBER: WITHIN 2 ~3 MIN)	① CONTACT RESISTANCE: 100mΩ MAX. ② INSULATION RESISTANCE: 50MΩ MIN. ③ NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—	
DAMP HEAT (STEADY STATE)	EXPOSED AT 40 ± 2 °C, 90 TO 95 %, 96 h.	① CONTACT RESISTANCE: 100mΩ MAX. ② INSULATION RESISTANCE: 25MΩ MIN. ③ NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—	
SULPHUR DIOXIDE	EXPOSED IN 25 PPM FOR 96h, 25°C, 75%. (REFER TO JIS C 60068)	① CONTACT RESISTANCE: 100mΩ MAX. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—	
COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	
△					
REMARKS		APPROVED	KH. IKEDA	09.09.03	
NOTE1: INCLUDE THE TEMPERATURE RISING BY CURRENT		CHECKED	TS. MIYAZAKI	09.09.03	
		DESIGNED	SH. HOSODA	09.09.02	
		DRAWN	SH. HOSODA	09.05.09	
Unless otherwise specified, refer to JIS C 5402 and IEC 60512		DRAWING NO.		ELC4-318071-75	
HRS	SPECIFICATION SHEET	PART NO.	BM10NB (0.8) -24DS-0.4V (75)		
	HIROSE ELECTRIC CO., LTD.	CODE NO.	CL684-6101-3-75	△	1/1

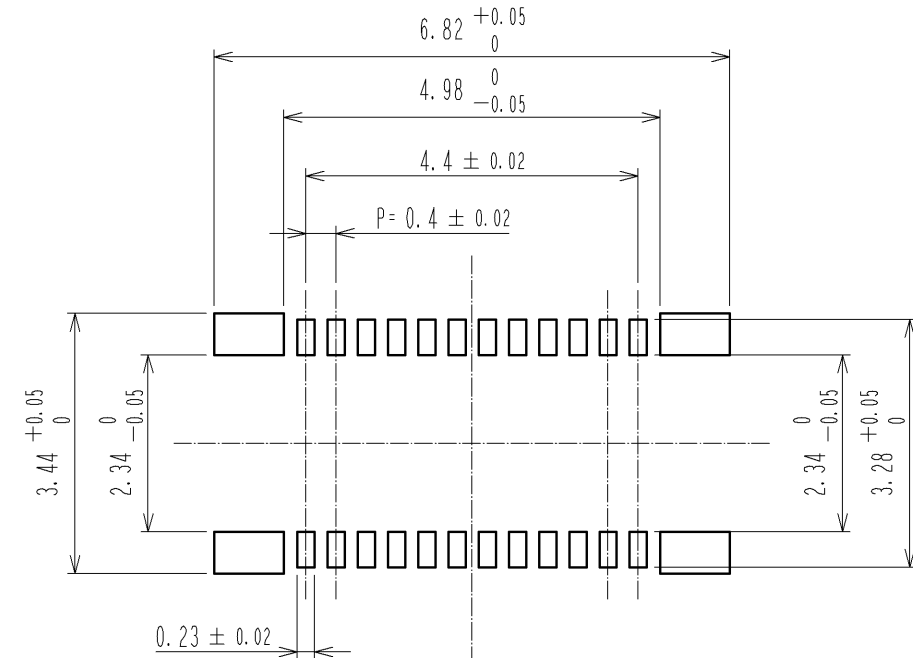


- NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. PER REEL : 8000 CONNECTORS.
3. AT THE BEGINNING OF THE REEL, 100 mm AT MIN SHALL BE EMPTY POCKETS.
AT THE END OF THE REEL, 160 mm AT MIN SHALL BE EMPTY.
4. CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.1 μ m MIN.
SMT LEAD : GOLD 0.05 μ m MIN.
UNDERPLATING : NICKEL 1 μ m MIN.
(SURFACE : SEALING)
5. METAL HOLD DOWN PLATING SPECIFICATIONS.
MOUNTING AREA: GOLD 0.05 μ m MIN.
UNDERPLATING : NICKEL 1 μ m MIN.
6. PEEL FORCE OF COVER TAPE REFERS TO JIS C 0806.


RECOMMENDED PATTERN

RECOMMENDED SOLDER PASTE : THICKNESS 120 μ m

A-A

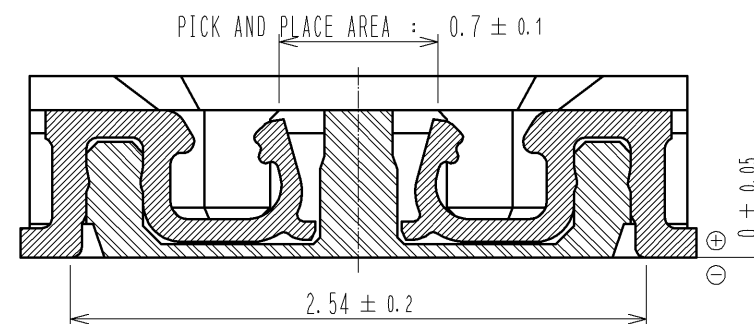

ENGAGEMENT FIGURE

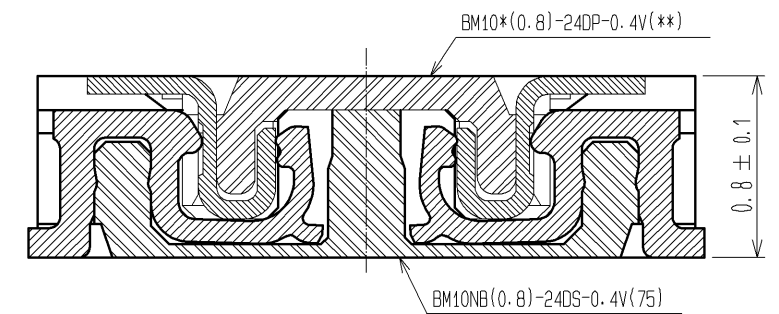

3	PHOSPHOR BRONZE		6	PS	PLASTIC REEL (BLACK)					
2	PHOSPHOR BRONZE		5	POLYESTER	CLEAR (COVER TAPE)					
1	LCP	UL94V-0. BLACK	4	PS	CLEAR (EMBOSSED CARRIER TAPE)					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm		 	SCALE FREE		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.			APPROVED : KH. IKEDA		09.09.03	DRAWING NO. EDC3-318071-75				
			CHECKED : TS. MIYAZAKI		09.09.03	PART NO. BM10NB<0.8>-24DS-0.4V<75>				
			DESIGNED : SH. HOSODA		09.08.31	CODE NO. CL684-6101-3-75				
			DRAWN : SH. HOSODA		09.05.09	 				

